

Rec'd PCT 14 OCT 2004



PCT/U03/00462

10/511177

REC'D 02 JUL 2003
WIPO PCT

Patent Office
Canberra

I, JONNE YABSLEY, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. PS 1798 for a patent by GEORGE BRAOUDAKIS as filed on 17 April 2002.

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



WITNESS my hand this
Twenty-fourth day of June 2003

J R Yabsley

JONNE YABSLEY
TEAM LEADER EXAMINATION
SUPPORT AND SALES

AUSTRALIA

Patents Act 1990

PROVISIONAL SPECIFICATION

Invention Title: CONTAINER WITH REMOVABLE PORTION

The invention is described in the following statement:

CONTAINER WITH REMOVABLE PORTION

This invention relates to a container with one or more removable portions and having particular application to packaging freshly prepared pizza style pies. However, it will be appreciated that the invention is not necessarily limited to this field of use.

Freshly prepared pizza style pies are frequently packaged in cardboard containers or cartons, referred to as "pizza boxes", to maintain freshness and temperature. Pizza boxes are often formed by folding a single sheet of paperboard or cardboard to form a square base panel, four wall panels standing upright therefrom to a relatively uniform height and a lid hinged to the upper edge of one of the wall panels. Usually the lid includes flaps extending from the three edges of a cover panel other than the edge with the hinge connection such that the lid may be pivoted about its hinged connection to the remaining wall panel to close a rectilinear space within the container and pivoted open to gain access to the contents of the pizza box. The flaps about the lid are usually arranged to fit inside the three walls when the pizza box is in its closed disposition.

Pizza boxes often have ventilation holes, the cardboard sheet from which one is formed nearly always being scored and slit at appropriate locations so that when it is folded up to form the pizza box, the parts lock together to prevent "unfolding" of the pizza box. Typically, the side walls of the pizza box are formed as "roll-over" walls formed by having an

outer wall panel extending from the edge of a base panel, and an inner wall panel extending from a wall top edge of the outer wall panel remote from the base panel, the relative widths of the outer and inner wall panels being such that the distal edge of the inner wall panel engages with the base panel at or near to a fold line along which the outer wall panel may be folded with respect to the base panel when the inner wall panel is folded with respect to the outer wall panel along the wall top edge until it is substantially alongside the outer wall panel. In this specification, the term "roll-over" walls refers to this and similar arrangements.

Additionally, even though pizza boxes are formed from single cardboard "blanks", the panels forming the boxes being joined along fold or score lines which are constituted by a weakening of the material, the term "edge" is used in this specification to refer to the join line between two adjoining panels even though the panel may be contiguous with one another.

Many pizza restaurants promote their wares not only on the pizza boxes themselves, but also with pamphlets, brochures, flyers and the like, sometimes by letterbox drops, and sometimes with the product sold from their restaurants or delivered to purchasers. Pizza boxes also represent one of the major overheads for pizza restaurants, and it could be advantageous if the cost of the boxes could be offset.

The present invention aims to provide a container, such as a pizza box, having one or more removable portions, which may be removed without substantially affecting the enclosing and/or strength properties of the container. In particular, the removable portions may be used for printing promotional material, or more particularly, the removable portions may be used as reward tokens offering special consideration for future purchases. The invention also aims to provide a method of promoting products by way of a container having one or more removable portions and/or to provide a method of subsidising the cost of a pizza box. Other aims and advantages of the invention may become apparent from the following description.

With the foregoing in view this invention in one aspect resides broadly in a container including:

two main panels, each substantially the same shape and having a plurality of substantially straight edges about its periphery, each edge extending angularly from each of two adjoining edges, and said main panels being joined to one another by a joining panel having substantially parallel edges each of which constitutes a hinge line along one of the edges of each said main panel;

a plurality of side walls depending from at least half of the edges of said main panels other than those in common with the hinge line, hereinafter referred to as remaining edges, said side walls and said joining panel enclosing a space between said main

panels when said main panels are pivoted towards one another to define the enclosed space;

wherein one or more of said side walls includes an outer wall panel and an inner wall panel, said outer wall panel
5 extending from a proximal fold or score line along a remaining edge and said inner wall panel extending from a distal fold or score line remote from the proximal fold or score line and along an opposed edge of said outer wall panel to form a roll-over wall; and

10 wherein one or more of said roll-over walls further include one or more removable portions operatively removable from a remaining wall portion such that the enclosing and/or strength properties of the container remain substantially unaffected upon removal of any one or more of said removable portions.

15 Although the removable portions may be provided on or as part of the inner wall panel or the outer wall panel, it is preferred that the removable panel be provided on the outer wall panel whereby removal of the removable panel from the remainder of the outer wall panel leaves the remainder of the outer wall
20 panel and the entire inner wall panel to provide the structural integrity of the container once the one or more of the removable panels have been removed.

In a preferred form, one of the main panels constitutes a base panel and the other a cover panel, and it is preferred that
25 all of the remaining sidewalls of one of the main panels be provided with the sidewalls described above. Suitably, the removable portion or portions are arranged with a perforation

line or line of weakness to facilitate removal from the remaining wall portion and inner wall panel. The remaining outer wall portion together with the inner wall panel (which is preferably left intact after removal of the removable portion) retain
5 sufficient structural integrity that the container remains stackable and performing its function in retaining the heat and/or freshness of its contents when enclosed therein.

Preferably the removable portion and/or the remaining wall portion include a slit or slot providing for a tab or the like to
10 facilitate easy removal of the removable portion from the outer wall panel. If the tabs or the like are provided on the lower surface or edge of the container, they can serve the added purpose of allowing the assembled container to sit off a surface (such as the top of an oven) to allow for the circulation of air.
15 Thus, if a container is placed on top of an oven to keep the enclosed contents warm, the container will not become soggy with moisture. It is also preferred that the removable portions be provided on the outer wall panel of the roll-over wall.

In a preferred form, the removable portions are provided
20 with markings indicating that they constitute an offer, coupon or token for a reward, such as a discount on further sales, preferably subject to predetermined conditions being met. Of course, the remainder of the container may be provided with markings such as promotional material as desired. The inner wall
25 panel may also be arranged with markings, which become revealed upon removal of a removable portion from the outer wall panel. The offer, coupon or token for a reward may also be provided in

the form of promotional advertising, discounts, prizes, special offers or the like from suppliers other than the supplier of the product contained in the container, and may be printed or pre-printed on the offer, coupon or token, or provided in the form of
5 an adhesive label or sticker and any other like form of marking.

Preferably, the sidewalls are at equal angles to each adjoining sidewall (or joining panel, as the case may be). In a preferred form, the side walls have substantially parallel edges such that the main panels close to a substantially parallel
10 spaced apart disposition, there being preferably three side walls which together with the joining panel constitute a four-sided carton forming a square or rectangular prism. The side walls and joining panel preferably have dimensions selected for the packaging of pizza style pies, and may include ventilation holes,
15 corner reinforcing tabs, simple single-paneled side walls on the main panel not having the roll-over walls and such like as desired.

The removable portion may be provided with magnetic material to permit the removable portion to be temporarily attached to a
20 metallic surface. For example, the ferromagnetic metal of typical white goods, such as refrigerators, may be used as temporary storage and/or display for the removable portions in this form.

25 In another aspect, this invention resides broadly in a container including:

two main panels, each substantially the same shape and having a plurality of substantially straight edges about its periphery, each edge extending angularly from each of two adjoining edges, and said main panels being joined to one another
5 by a joining panel having substantially parallel edges each of which constitutes a hinge line along one of the edges of each said main panel;

a plurality of side walls depending from at least half of the edges of said main panels other than those in common with the
10 hinge line, hereinafter referred to as remaining edges, said side walls and said joining panel enclosing a space between said main panels when said main panels are pivoted towards one another to define the enclosed space;

wherein one or more of said side walls includes an outer
15 wall panel and an inner wall panel, said outer wall panel extending from a proximal fold or score line along a remaining edge and said inner wall panel extending from a distal fold or score line remote from the proximal fold or score line and along an opposed edge of said outer wall panel to form a roll-over
20 wall; and

wherein one or more of said inner wall panels further include a lateral extension extending beyond the distal fold or score line to an end, each lateral extension separated from its associated inner wall panel by a transverse fold line and having
25 a further fold line intermediate the transverse fold line and the end whereby upon folding of the container, the lateral extensions may be folded to form a chamber adjacent the corner between the

roll-over wall or walls having the lateral extension and its or their adjoining side wall or walls.

In another aspect, this invention resides broadly in a blank
5 for a carton including:

two main panels, each main panel being substantially the same shape and having a plurality of substantially straight edges or fold or score lines about its periphery, each edge, fold or score line extending angularly to each of two adjoining edges or
10 fold or score lines, and said main panels being joined to one another by a joining panel having substantially parallel edges each of which constitutes a hinge line in common with one of the fold or score lines of each main panel;

a plurality of side panel assemblies extending from the
15 remaining fold or score lines about said main panels such that at least half of the periphery of both main panels is constituted by a fold or score line from which said side panels extend;

wherein one or more of said side panel assemblies includes an outer wall panel and an inner wall panel, said outer wall
20 panel extending from a proximal fold or score line in common with the fold or score line at the periphery of the adjoining main panel and said inner wall panel extending from a distal fold or score line remote from the proximal fold or score line; and

wherein one or more of said side panel assemblies further
25 include one or more lines of weakness circumscribing one or more removable portions from a remaining panel portion, the remaining panel portion being sufficient that the enclosing and/or strength

properties of the container when assembled from the blank remain substantially unaffected upon removal of any one or more of said removable portions.

5 In another aspect, this invention resides broadly in a method of promoting goods and/or services including:

providing a container having one or more removable portions as herein described; and

providing markings on the removable portions indicating
10 promotional advertising, discounts, prizes, special offers or the like from suppliers other than the supplier of the product contained in the container.

In another aspect, this invention resides broadly in a
15 method of decreasing overheads of a business providing goods in a container, the method including:

providing one or more removable portions in operative association with the container;

obtaining payment from one or more other businesses to
20 advertise other goods and/or services; and

providing markings on the removable portions indicating the advertising of the other businesses thereon whereby the cost of the advertising and at least some of the overhead associated with the production of the container may be offset by the payment
25 obtained from the other businesses.

Preferably the container is a container with integral removable portions as hereinbefore described. However, the invention may be performed with containers of the prior art having removable portions attached thereto. In that case the removable portions could be attached to the container by any means as is known in the art but conveniently could be in the form of stickers.

The advertising may be by way of promotional indications, discounts, prizes, special offers or the like promised by way of the markings on the removable portions.

It is preferred that one or more of the removable portions is provided with a unique identifier, preferably a barcode, so that customer acceptance and usage of the promotional offers can be monitored.

15

In order that the invention may be more readily understood and put into practical effect, reference will now be made to the accompanying drawings which illustrate a range of containers according to the invention, all in pattern development form, for a blank which may be folded to form a container for a pizza style pie, and wherein:

Fig. 1 is for a container that may be adapted to include one or more removable panels;

Figs. 2A and 2B are for two containers each having one or more removable panels forming part of an outer wall panel of roll-over wall and corner holding tabs;

25

Figs. 3A and 3B are for containers similar to those of Figs. 2A and 2B;

Figs. 4A, 4B, and 4C are for another form of container which is particularly preferred;

5 Fig. 5A and 5B are for containers similar to those of Figs. 4A, 4B and 4C and which are reversible;

Figs. 6A to 6F are for containers having variations of the roll-over wall;

10 Figs. 7A to 7H are for containers having further variations from those in previous Figs;

Figs. 8A, 8B and 8C are for containers wherein the inner and outer walls are transposed;

Figs. 9A and 9B are for containers having bigger slots; and

15 Figs. 10A to 10D are for containers having different shaped panels to accommodate different formats of coupon.

The elements of each container represented in the drawings are referred to by the same reference numerals. Each drawing has a table referring to the assembly instructions for the containers illustrated with reference numerals indicating similar elements
20 in, or elements having a similar function for, each container. The particular element and reference numeral are referred to in relevant table. Additionally, the terms "inner wall panel" and "outer wall panel" refer to the relative dispositions of the panels with respect to the container in its assembled form, even
25 though when in pattern development unfolded flat, the "inner wall panels" are located to the "outside" of the "outer wall panels".

Each of the containers shown has a top panel 40 and a bottom panel 41 joined together by a joining panel 42 along a bottom hinge line 10 between the bottom panel and the joining panel and a top hinge line 12 between the top panel and the joining panel.

5 The top and bottom panels are substantially square and the joining panel is relatively narrow (compared to its width) such that a relatively shallow container is provided for enclosing pizza style pies.

Side walls extend from the three edges of each top and bottom panel of all but the containers shown in Figs. 5R, 7A and 7E, where the top panel has only one side wall extending from the edge remote from the top hinge line, and Fig. 7C, where the top panel has two side walls, one extending from each of the edges adjacent the top hinge line. There are two basic styles of side wall, a "roll-over" style side wall shown at 44 in Fig. 1 and a simple, single-layer side wall shown at 45 in Fig. 2A. In Fig. 1, a "triple" roll-over style wall 45a is provided on three sides of the top panel. It will be appreciated that roll-over walls can be made up of more than two or three layers if desired.

15 Apart from the examples shown in Figs. 5R, 7A, 7C and 7E, where some of the edges of the top panel have no sidewalls, the sidewalls are of either the roll-over style or the single-layer. In Figs. 10A-D, the two side walls adjacent the top or bottom hinge line include an extension panel 17 extending along the roll-over fold line 15.

25

Insofar as the roll-over side walls are concerned, each has an inner panel 49 which is first folded about a roll-over fold

line designated reference numeral 2 in respect of the side walls adjacent the hinge lines or reference numeral 7 in respect of the side walls opposite the joining panel. The roll-over fold line is constituted by two closely spaced fold lines which enable the
5 outer panels to be folded by bending the sheeting from which the container is formed 180° about the roll-over fold line, or about 90° for each of the closely spaced fold lines, such that the outer panel lies substantially flat against an adjoining inner panel 48.

10 One or more edge tabs 3 engage with corresponding locking slots 4 when the inner panel is folded to substantially 90° with respect to its adjoining top or bottom panel. The locking slots are aligned along an inner fold line designated reference numeral 1 in respect of the side walls adjacent the hinge lines or
15 reference numeral 6 or 11 in respect of the side walls opposite the joining panel. The edge tabs penetrate at least part way into the locking slots when the roll-over wall is constructed by way of the aforementioned folding of the outer and inner panels with respect to one another and then folding the inner panel
20 along the inner fold line to substantially 90°.

Insofar as the simple sidewalls are concerned, simple sidewall panels 51 are folded at 90° to the top or bottom panel (as the case may be) along the inner fold line.

Some of the side wall panels have side tabs 8, 22, 25 as
25 shown which are inserted between the inner and outer side wall

panels of adjacent side walls by following the instructions given in the respective tables associated with each Fig.

In all forms shown, removable portions are shown with reference numeral 46. Where the removable portion is removed from an outer wall panel, support portions 47 are provided intermediate adjacent removable panels.

Once a container according to the invention has been assembled, a pizza style pie may be contained inside it for transport to the location of consumption. One or more removable portions may be removed from the container without substantially affecting the heat retention and/or structural properties of the container. The removable portion, in the form of an offer, coupon or discount may be retained for later use. The offer, coupon or token may be redeemed to receive the consideration promised in association with the offer coupon or token.

The aspects of the invention relating to the method of promoting goods and/or services and the method of decreasing overheads of a business providing goods in a container provide several particular benefits and advantages over the prior art.

"Coupons" are valuable marketing devices for providers of consumer goods or services. Added value is provided to the consumer and the coupons generate more products, profits and goodwill. Promoters and advertisers have used a variety of promotional media in which to gain consumers' attention. Such media have included the more "traditional" forms of advertising and promotion in magazine and newspaper advertisements and in

clothing promotions such as caps and shirts. As consumer demands alter, different forms of advertising and promotion are required. The introduction of new types of promotion includes the greater use and acceptance of "coupon promotion" and advertising.

5 As mentioned hereinabove, pizza boxes represent one of the major cost overheads for pizza restaurants and therefore box manufacturers have made many changes to box design, composition and method of manufacture in an effort to reduce the cost. Given the number of boxes used, a cost saving of as little as 0.5 cents
10 per box is highly significant and can be a major market advantage to a particular box supplier. However, it seems that the cost of manufacture has been reduced to about its limit to the point where there is no more cost to be saved by that means alone. Thus, the only viable means for further cost reduction appears to
15 be in subsidization of the cost of the boxes, for example by an advertiser or promoter. Using a box as described herein, a promoter would pay the box supplier/manufacturer to include a detachable promotion coupon and/or a form of advertisement on the box. That promotion coupon would be redeemable at a relevant
20 participating store or company. A particular promotion could include any product or service.

It is advantageous to include a unique identifier on a coupon in a numeric or similar format, such as a barcode, to allow the promoter to monitor consumer acceptance of the
25 promotion. For example, if a promotion included coupons for several different products on the same type of box and those boxes were distributed in more than one geographical area, by

checking the coupons as they are redeemed the promoter can determine that a given product is popular in one area rather than another. Using that information, the promoter can then target that area with the given product in subsequent promotions.

5

The methods further include the following features:

- ❖ Improvement and enhancement of quality control, for example by subsidization of the cost of shrink wrapping to improve hygiene in box handling and storage.
- 10 ❖ Running multiple promotions on the same medium, thereby promoting a range of various products and having the effect of increasing consumers' repeat business by adding value to the consumer without altering the pizza quality or price.
- 15 ❖ Flexibility of being able to customise promotional material for particular geographic regions, such as regional or metropolitan and similarly to allow for independent franchise distribution.

Fig. 1 in particular is an example of a container in accordance with the invention in which the base has roll-over walls on three sides and the lid has "triple" roll-over walls on the corresponding three sides of the lid. This serves to illustrate that there may be multiple roll-over walls if the structural characteristics of the container material dictate that this is desirable. The container may also be reversed so that the lid acts as the base and vice versa.

Fig. 1R has roll-over walls on three sides of both the lid and the base, with the outer panel of the roll-over walls of the sides adjacent the bottom hinge line being shortened to provide corner reinforcing by folding the tabs 90° and reverse 90° at fold lines 34 and 35. In such form, a relatively small chamber is provided in the container when assembled, and the chamber helps to reinforce the corner of the container. Additionally, the chamber may be used to enclose additional products, such as sauces, condiments, prizes, gifts, toys, promotional items or the like. The folded tabs (along fold lines 34 and 35) can be made in any suitable or desired length and, by adaptation, can also perform the function of removable portions for coupons.

Fig. 2A and 2B have half-oval tabs 22 extending from side wall panels remote from the joining panel, with roll-over walls and single side walls as shown. Fig. 2R has the corner reinforcing as described in respect of Fig. 1R.

Figs. 3A and 3B are similar to Figs. 2A and 2B, except that the corner tabs 8 are at a different location in relation to the

remainder of the sidewall panels. Two removable portions are provided on a third wall panel 36, and it will be appreciated that the containers may be "reversed" in that the lid may be used as a base and vice versa. The third wall panel is also provided
5 about three of the sides of the top of the design shown in Fig. 1. As in the case of Figs. 1R and 2R, the container shown in Fig. 3R has corner reinforcing.

Figs. 4A, 4B and 4C show the preferred designs for the container. The example shown in Fig. 4A does not include
10 removable panels according to the invention, but is provided to show a configuration to which such panels may be added if desired. Fig. 4C in particular shows various shapes of removable panel, being triangular as shown typically at 46a, hexagonal as shown typically at 46b, rectangular as shown typically at 46c,
15 square as shown typically at 46d and round as shown typically at 46e. Of course, a container having several different shapes of removable panel is possible, but it will be appreciated that the form shown in Fig. 4C is illustrative only of the range of shapes that could be used, and is not intended to limit the shape of the
20 removable panel to those shown. Fig. 4R illustrates the application of the corner reinforcing similar to the arrangement shown in Figs. 1R, 2R and 3R.

The container shown in Figs. 5A and 5B include an extra tab 3A extending from the removable panels to facilitate their easy
25 removal from the container. Fig. 5R illustrates the application of the corner reinforcing in the manner hereinbefore described.

Figs. 6A to 6F show variations of the roll-over wall. Each container shown therein is reversible. Fig. 6A shows a basic blank without removable panels. Fig. 6B has the corner reinforcing panel 25 attached to the inner wall panel instead of the outer wall panel, and has extra tabs 3 and 4, and roll-over walls along the edges of the top and bottom panels remote from the joining panel, indicated by reference numerals 33 and 14. Fig. 6C has the removable coupons shown in accordance with the invention, and has the corner reinforcing panel 25 attached to the joining panel 42 instead of sidewall 18. Figs. 6D to 6F have the corner reinforcing tabs 8 attached to the side walls 18 and 23 instead of the front walls 14 and 33. Fig. 6E has three removable coupons per side wall and Fig. 6F shows an example of an alternative shape of the ends of the side walls on the lid, the ends being cut off at a slant rather than at 90° to the fold line.

Figs. 7A through 7H show further variations. Fig. 7A shows a basic blank without removable panels. Fig. 7B is the same as Fig. 7A, but includes single sidewall panels 23. Fig. 7C has panel 8 attached to panel 18 rather than panel 14 and panel 25 attached to panel 18 rather than panel 42, and panel 13 removed. Fig. 7D shows a slight variation of panel 23. Fig. 7E is similar to Fig. 7A except that panels 25 and 8 are attached to panel 18 instead of panels 42 and 14. Fig. 7F shows a basic roll-over panel for the front walls 14 and 33 only. Fig. 7G shows an example where the roll-over wall on the front wall 33 has been replaced by a single wall panel 13, and the corner reinforcing

tab 8 has been removed. The top panel also fits inside the bottom panel. Fig. 7H shows a somewhat different approach to providing the removable panels in relation to the sidewalls of the container according to the invention.

5 Figs. 8A, 8B and 8C show alternative designs in which the inner and outer walls are swapped in terms of having the removable panels on the inside of the roll-over walls, with further variations in terms of the placement of corner reinforcing panels 25, half-oval tabs 22 and a roll-over wall for
10 the front wall of the lid as the case may be. Some of the inner wall panels also include three tab extensions 19, which each engage with a respective small slot 20 formed along the fold line 6. In Figs. 9A, 9B and 10D, the tab extensions 19a and small slots 20a are slightly larger than in Figs. 8A, 8B and 8C.

15 In Figs. 10A-D, a distal panel 17 is provided which does not necessarily form a roll-over wall, but may be folded to an angle between 180° and 90° (but could also, for example, be folded to about 90° so that the side wall has an L-shaped section). Figs. 10C and 10D in particular show that the distal panel 17 can be of
20 an extended width to provided a larger number of removable panels or a larger size of removable panel respectively, but it will be seen that Figs. 10A, 10B and 10D share many of the same features as Fig. 10C.

It will be appreciated that where containers have been
25 described as being without removable panels in relation to the drawings, removable panels may be provided by adaptation of the

pattern developments described as being in accordance with the present invention.

The containers in accordance with the present invention may be used for reducing the overheads of a business that requires goods to be enclosed in a container or containers. Where corner reinforcing is provided in accordance with the invention, extra goods, such as, for example, in the case of a pizza box in accordance with the invention, extra sauce or sauces, condiments, prizes, gifts, toys, promotional items and the like may be provided in the chamber formed by the corner reinforcing.

Although the invention has been described with reference to a selection of illustrative examples, it will be appreciated by persons skilled in the art that the invention may be embodied in other forms within the broad scope and ambit as herein set forth.


Dated this 17th day of April 2002

GEORGE BRAOUDAKIS

By His Patent Attorneys


20 PIPERS

Figure No. 1.

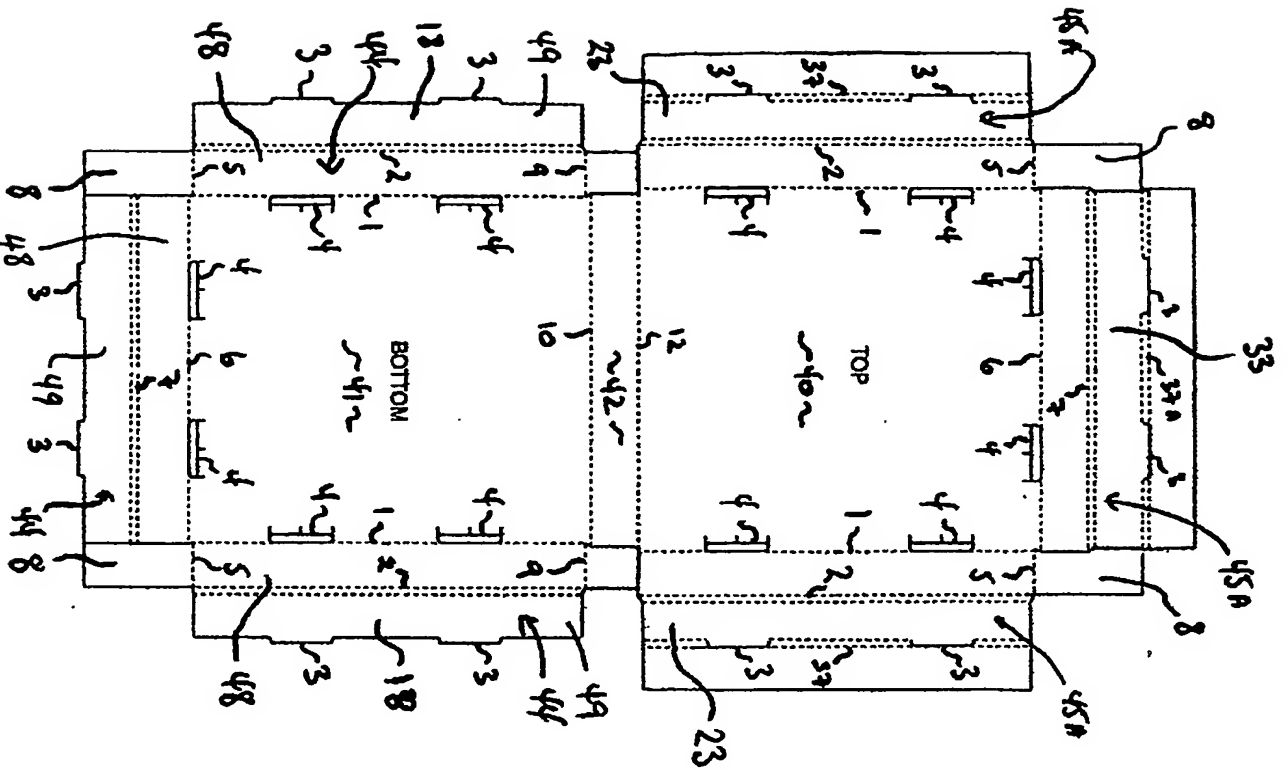


- A. Fold Bottom panel (1) 90 degrees.
- B. Fold Bottom panel (2) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (5) 90 degrees.
- E. Repeat A to D on the opposite side.
- F. Fold Bottom panel (6) 90 degrees.
- G. Fold Bottom panel (7) 180 degrees around (8).
- H. Slot (3) into (4).
- I. Fold (37) 180 degrees or Reverse 80 degrees.
- J. Fold Top panel (1) 80 degrees.
- K. Fold Top panel (2) 180 degrees.
- L. Slot (3) into (4).
- M. Fold (5) 80 degrees.
- N. Repeat I to N on the opposite side.
- O. Fold (37A) 180 degrees or Reverse 80 degrees.
- P. Fold Top panel (6) 80 degrees.
- Q. Fold Top panel (7) 180 degrees around (8).
- R. Slot (3) into (4).
- S. Fold (9) 90 degrees on both sides.
- T. Fold (10) 80 degrees.
- U. Fold (12) 90 degrees till Top panel sits over the top of Bottom panel and (33) + (23) are sitting on the outside walls of (14) + (18).

Figure No. 2 A

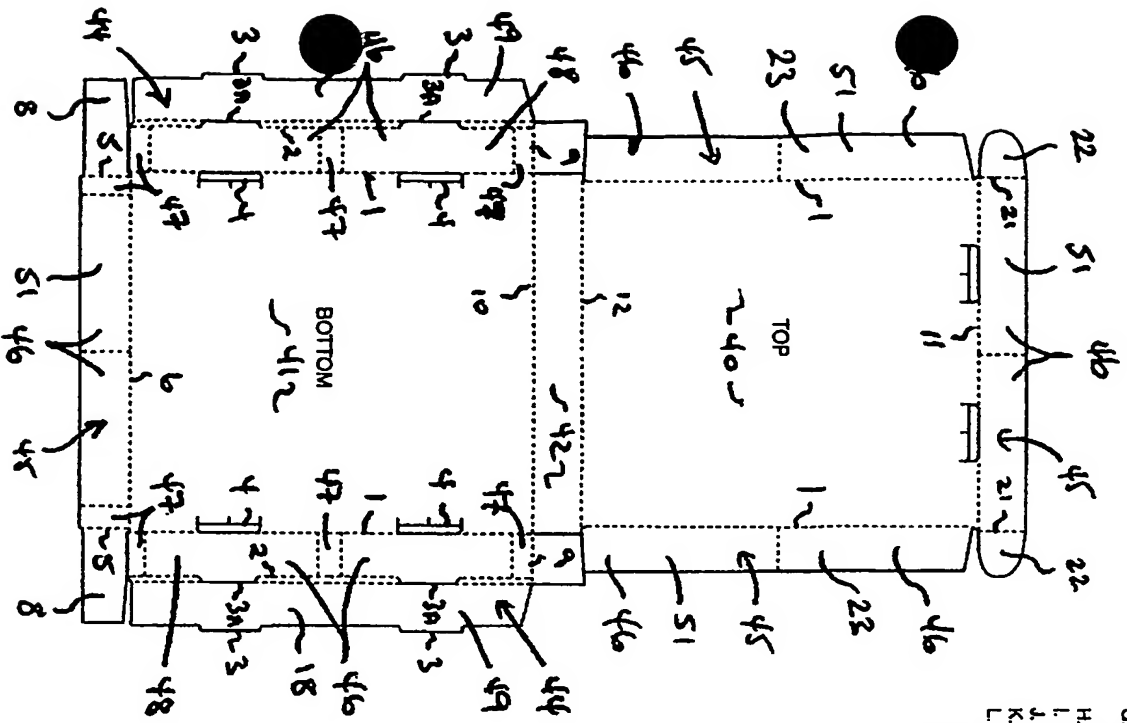


- A. Fold (6) 90 degrees.
- B. Fold (5) 90 degrees both sides.
- C. Fold Bottom panel (1) 90 degrees.
- D. Fold Bottom panel (2) 180 degrees around (6).
- E. Slot (3) into (4).
- F. Repeat C to E to the opposite side.
- G. Fold Top panel (1) 90 degrees on both sides.
- H. Fold (11) 90 degrees.
- I. Fold (21) 90 degrees on both sides.
- J. Fold (9) 90 degrees on both sides.
- K. Fold (10) 90 degrees.
- L. Fold (12) 90 degrees until (22) is slotted into the opening of (18) on both sides and to place (23) on the inner walls of the Bottom panel (18).

Figure No. 2 B

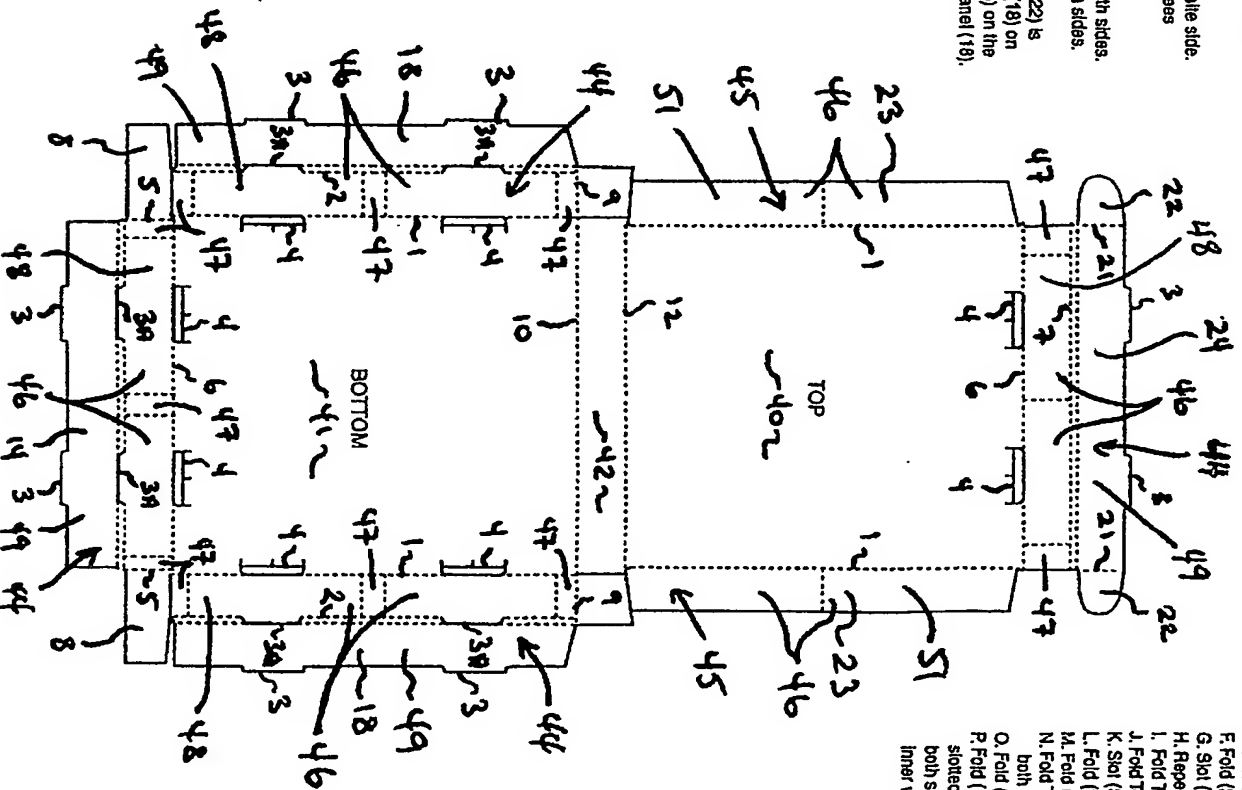


- A. Fold Bottom panel (6) 90 degrees.
- B. Fold Bottom panel (7) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (5) 90 degrees on both sides.
- E. Fold Bottom panel (1) 90 degrees.
- F. Fold (2) 180 degrees around (6).
- G. Slot (3) into (4).
- H. Repeat E to G to opposite side.
- I. Fold Top panel (6) 90 degrees.
- J. Fold Top panel (7) 180 degrees.
- K. Slot (3) into (4).
- L. Fold (21) 90 degrees on both sides.
- M. Fold (9) 90 degrees on both sides.
- N. Fold Top panel (1) 90 degrees on both sides.
- O. Fold (10) 90 degrees.
- P. Fold (12) 90 degrees until (22) is slotted into the opening of (18) on both sides and to place (23) on the inner walls of the Bottom panel (18).

Figure No. 3A

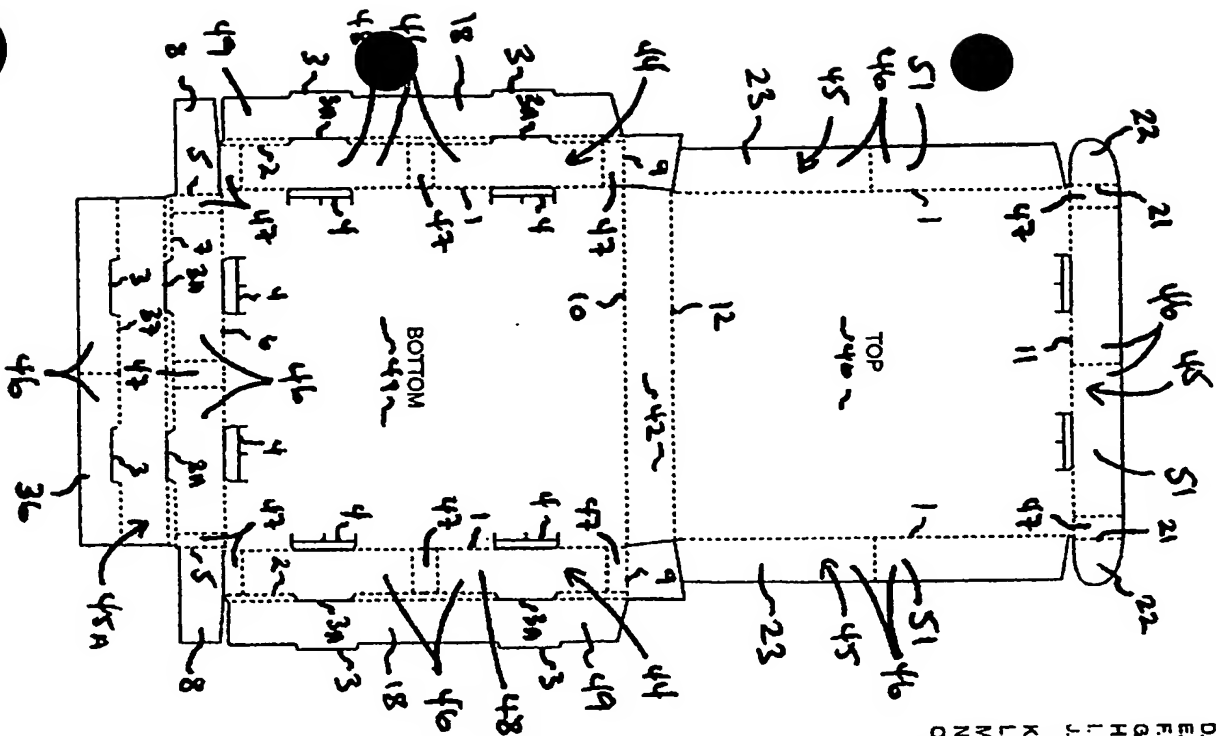


- A. Fold (6) 90 degrees.
- B. Fold (37) 180 degrees or Reverse 90 degrees.
- C. Fold (7) 180 degrees and (39) will sit flat on the Bottom panel.
- D. Slot (3) into (4).
- E. Fold (5) 90 degrees.
- F. Fold Bottom panel (1) 90 degrees.
- G. Fold (2) 180 degrees around (8).
- H. Slot (3) into (4).
- I. Repeat E to H on the opposite side.
- J. Fold Top panel (1) 90 degrees on both sides.
- K. Fold (11) 90 degrees.
- L. Fold (21) 90 degrees on both sides.
- M. Fold (9) 90 degrees on both sides.
- N. Fold (10) 90 degrees.
- O. Fold (12) 90 degrees until (22) is slotted into the opening of (18) on both sides and to place (23) on the inside of the bottom panel (10).

Figure No. 3B


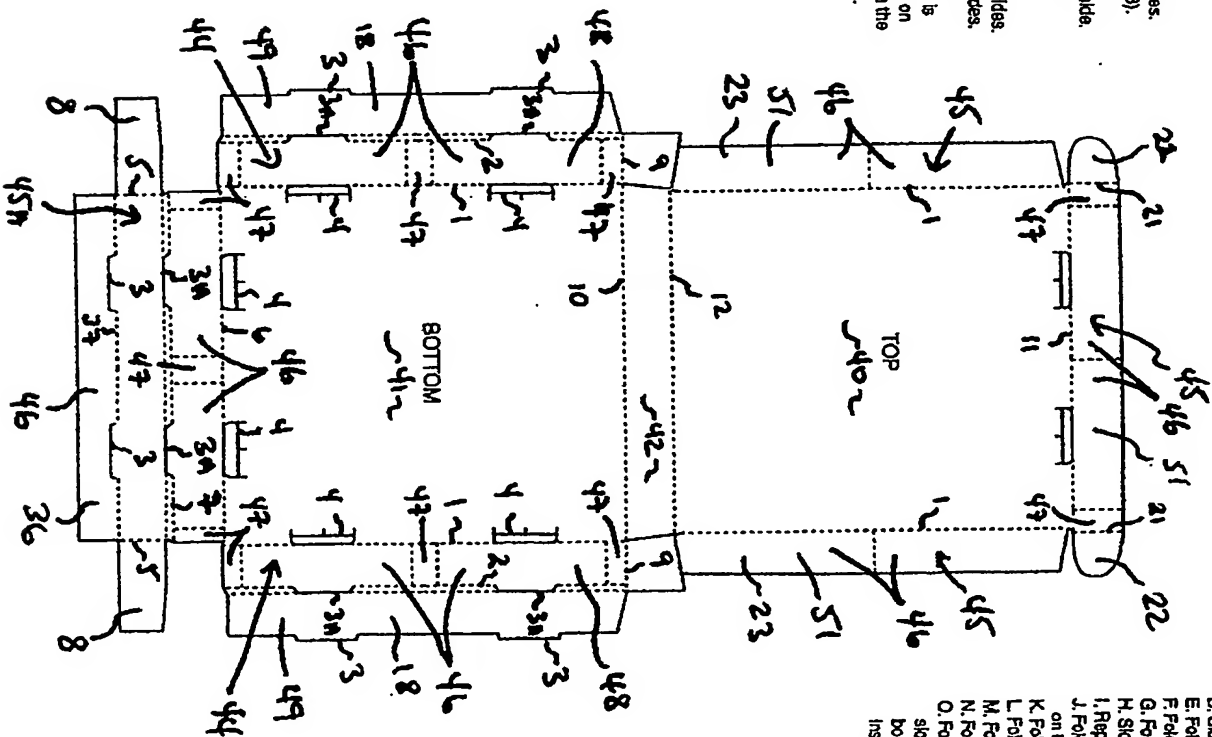


- A. Fold (6) 90 degrees.
- B. Fold (37) 180 degrees or Reverse 90 degrees.
- C. Fold (7) 180 degrees and (39) will sit flat on the Bottom panel.
- D. Slot (3) into (4).
- E. Fold (5) 90 degrees.
- F. Fold Bottom panel (1) 90 degrees.
- G. Fold (2) 180 degrees around (8).
- H. Slot (3) into (4).
- I. Repeat E to H on the opposite side.
- J. Fold Top panel (1) 90 degrees on both sides.
- K. Fold (11) 90 degrees.
- L. Fold (21) 90 degrees on both sides.
- M. Fold (9) 90 degrees on both sides.
- N. Fold (10) 90 degrees.
- O. Fold (12) 90 degrees until (22) is slotted into the opening of (18) on both sides and to place (23) on the inside of the bottom panel (10).

Figure No. 4 A

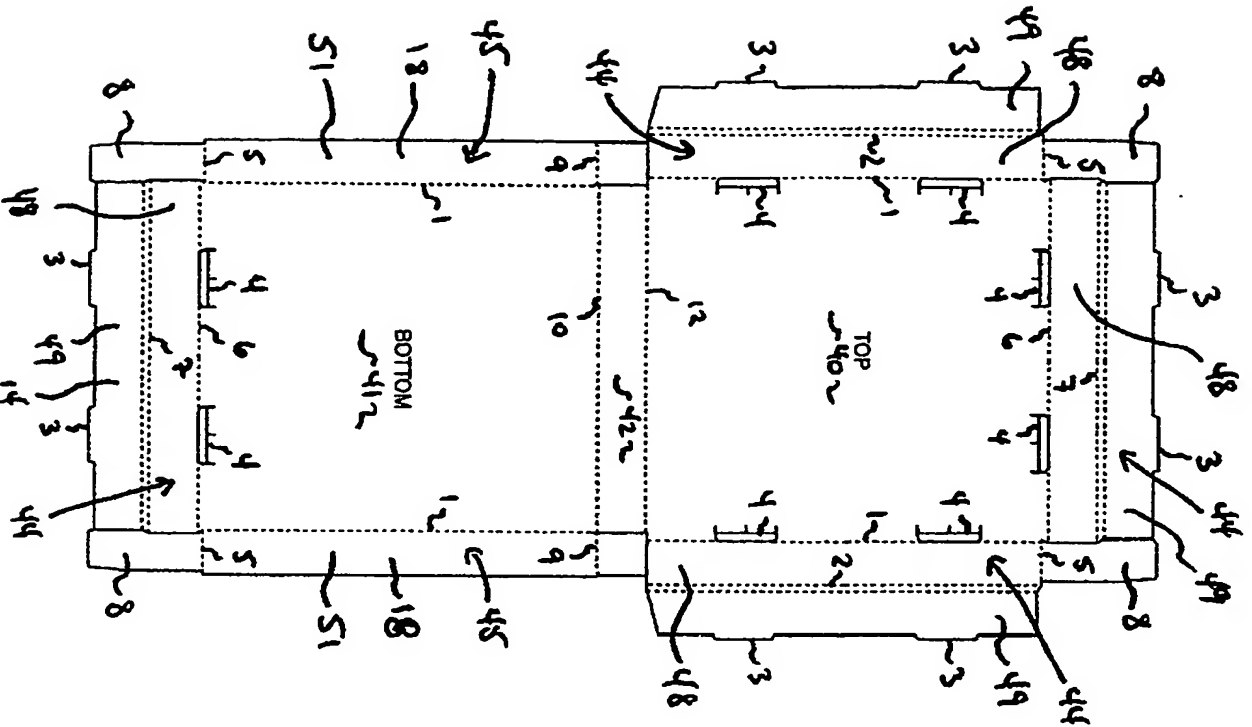

- A. Fold Bottom Panel (1) 90 degrees on both sides.
- B. Fold Bottom panel (5) 90 degrees on both sides.
- C. Fold Bottom panel (6) 90 degrees.
- D. Fold Bottom panel (7) 180 degrees around (9).
- E. Slot (3) into (4).
- F. Fold Top panel (1) 80 degrees on both sides.
- G. Fold Top panel (2) 180 degrees on both sides.
- H. Slot (3) into (4).
- I. Fold Top panel (5) 90 degrees on both sides.
- J. Fold Top panel (6) 90 degrees.
- K. Fold Top panel (7) 180 degrees around (9).
- L. Slot (3) into (4).
- M. Fold (9) 90 degrees on both sides.
- N. Fold (10) 90 degrees.
- O. Fold (12) 80 degrees till Top panel sits over the outer walls of (14) + (18).

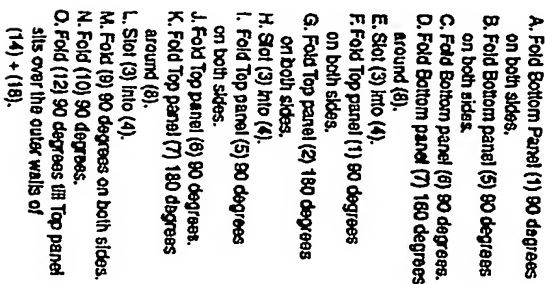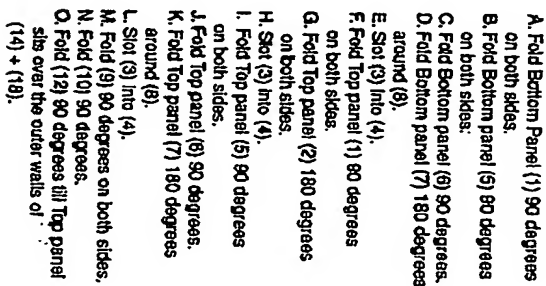


[illegible]

-


- A. Fold (9) 90 degrees.
- B. Fold (10) 90 degrees.
- C. Fold Bottom panel (1) 90 degrees.
- D. Fold Bottom panel (2) 180 degrees around (22).
- E. Stick (9) into (4)
- F. Repeat C to E on the opposite side
- G. Fold Bottom panel (5) 90 degrees on both sides.
- H. Fold Bottom panel (6) 90 degrees.
- I. Fold Bottom panel (7) 180 degrees around (8).
- J. Slot (3) into (4).
- K. Fold Top panel (1) 90 degrees on both sides.
- L. Fold Top panel (5) 90 degrees on both sides.
- M. Fold Top panel (6) 90 degrees.
- N. Fold Top panel (7) 180 degrees around (6).
- O. Slot (3) into (4).
- P. Fold (12) 90 degrees **W** Top panel sits inside Bottom panel wraps of $(14) + (16)$.

Figure No. 6 A

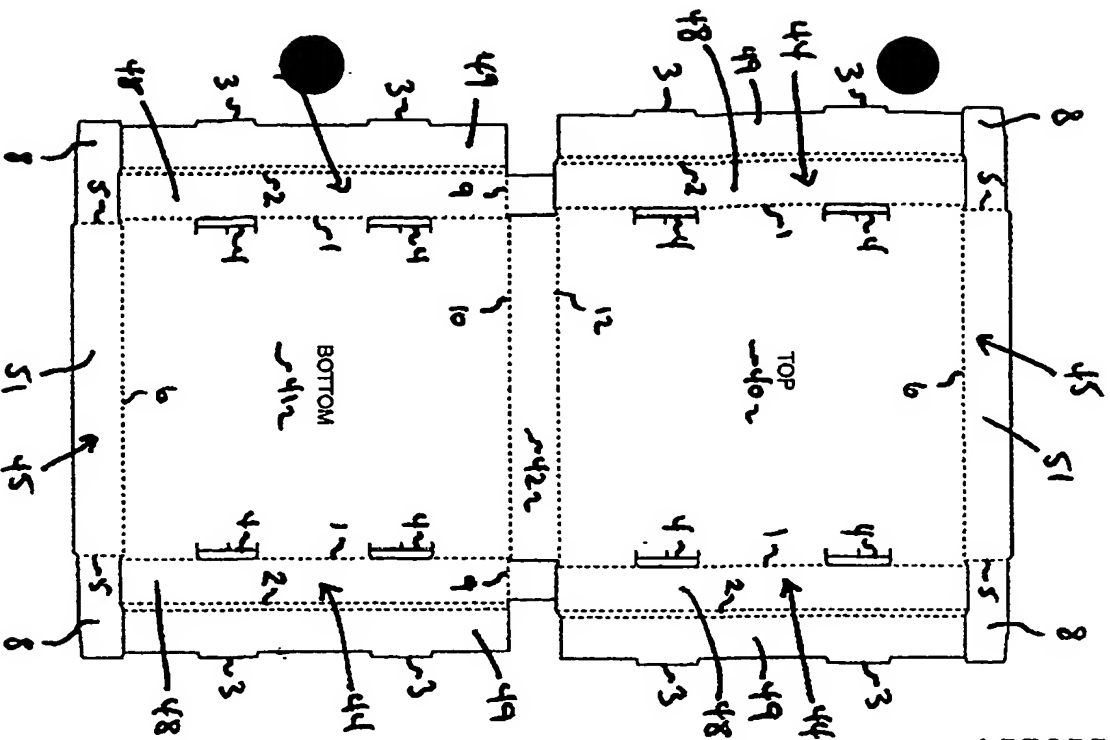

- A. Fold Bottom panel (6) 90 degrees.
- B. Fold Bottom panel (5) 90 degrees.
- C. Fold Bottom panel (1) 90 degrees.
- D. Fold Bottom panel (2) 180 degrees around (8).
- E. Slot (3) into (4).
- F. Repeat B to E on the opposite side.
- G. Repeat A to F on the Top panel.
- H. Fold (9) 90 degrees on both sides.
- I. Fold (10) 90 degrees.
- J. Fold (12) 90 degrees till the Top panel is sitting over the Bottom panel.

Figure No. 6 B

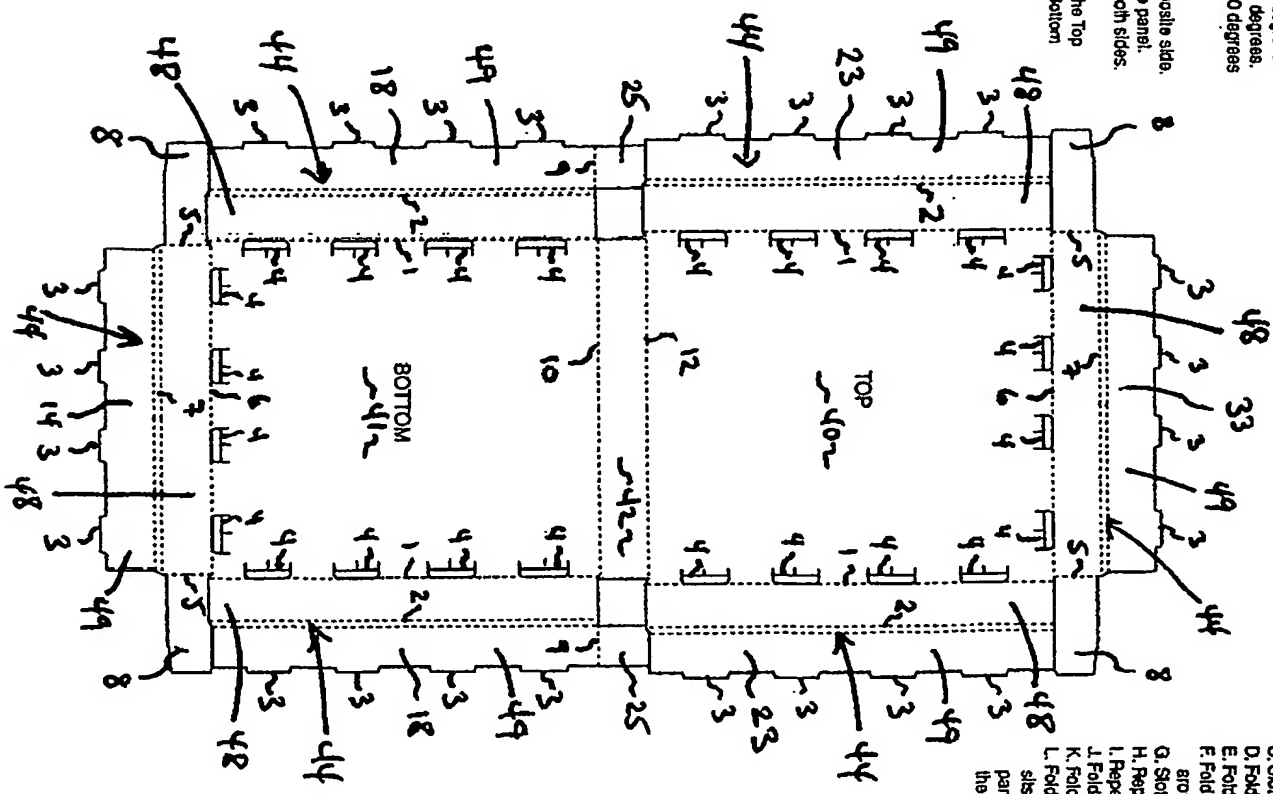

- A. Fold Bottom panel (6) 90 degrees.
- B. Fold Bottom panel (7) 180 degrees.
- C. Slot (3) into (4).
- D. Fold Bottom panel (5) 90 degrees.
- E. Fold Bottom panel (1) 90 degrees.
- F. Fold Bottom panel (2) 180 degrees around (8).
- G. Slot (3) into (4).
- H. Repeat D to G on the opposite side.
- I. Repeat A to H on the Top panel.
- J. Fold (9) 90 degrees on both sides.
- K. Fold (10) 90 degrees.
- L. Fold (12) 90 degrees till Top panel sits over the top of the Bottom panel and (33) + (23) is sitting on the outside walls of (14) + (18).

Legend:

- E. Fo
- F. Fo
- G. Fo
- H. Fo
- I. Sic
- J. Re
- K. Re
- L. Fo
- M. Fo
- N. Fo
- O. Si
- P. Re
- Q. Fo
- Sil
- Dr
- In

- [illegible]


[illegible]

- A. Fold Bottom panel (1) 90 degrees.
- B. Fold Bottom panel (2) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (5) 90 degrees.
- E. Repeat A to D on the opposite side.
- F. Fold Bottom panel (7) 90 degrees.
- G. Fold Bottom panel (6) 180 degrees around (9).
- H. Slot (3) into (4).
- I. Repeat A to H for Top panel.
- J. Fold (9) 90 degrees on both sides.
- K. Fold (10) 90 degrees.
- L. Fold (12) 90 degrees in Top panel slots over the top of Bottom panel and (33) + (23) are sitting on the outside walls of (14) + (18).

-


- A. Fold Bottom panel (1) 90 degrees.
- B. Fold Bottom panel (2) 180 degrees.
- C. Slit (3) into (4).
- D. Fold (5) 90 degrees.
- E. Repeat A to D on the opposite side.
- F. Fold Bottom panel (6) 90 degrees.
- G. Fold Bottom panel (7) 180 degrees around (6).
- H. Slit (3) into (4).
- I. Repeat A to H for Top panel.
- J. Fold (6) 90 degrees.
- K. Fold (10) 90 degrees.
- L. Fold (12) 90 degrees III Top panel sits over the top of Bottom panel and (35) + (23) are sitting on the outside walls of (14) + (18).

Figure No. 7 A

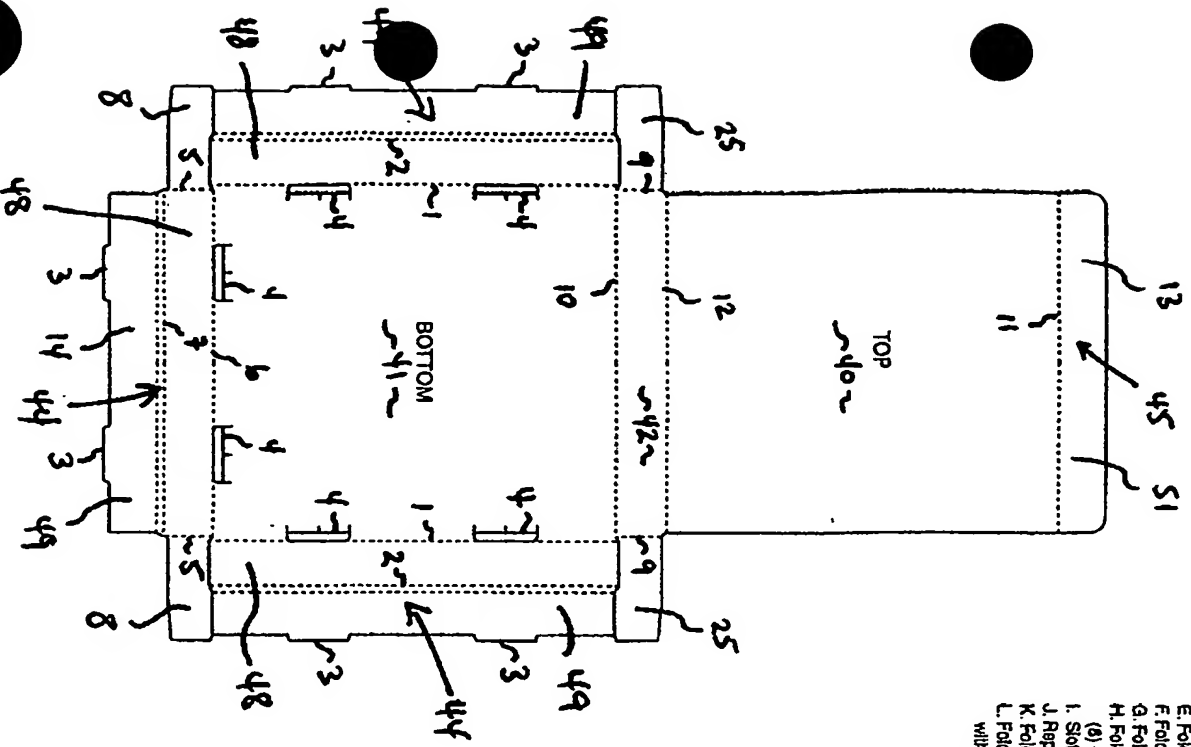


- A. Fold (6) 90 degrees.
- B. Fold (7) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (5) 90 degrees on both sides.
- E. Fold (10) 80 degrees.
- F. Fold (9) 80 degrees on both sides.
- G. Fold (1) 90 degrees.
- H. Fold (2) 180 degrees around (9) + (25).
- I. Slot (3) into (4).
- J. Repeat G to I on the opposite side.
- K. Fold (11) 90 degrees.
- L. Fold (12) 80 degrees till (13) is slotted within the inner wall of (14).

Figure No. 7 B

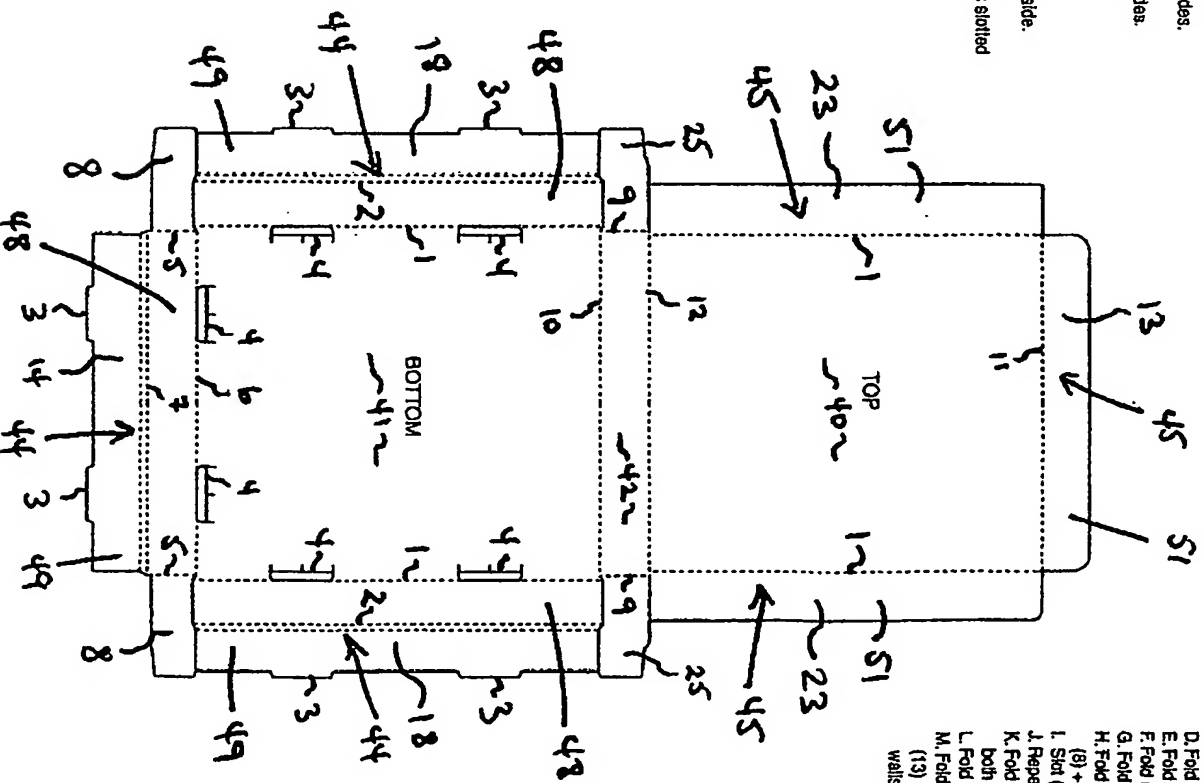


- A. Fold (6) 80 degrees.
- B. Fold (7) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (5) 90 degrees on both sides.
- E. Fold (10) 90 degrees.
- F. Fold (9) 80 degrees on both sides.
- G. Fold (1) 80 degrees.
- H. Fold (2) 180 degrees around (9) + (25).
- I. Slot (3) into (4).
- J. Repeat G to I on the opposite side.
- K. Fold Top panel (1) 80 degrees on both sides.
- L. Fold (11) 90 degrees.
- M. Fold (12) 90 degrees and slot (13) + (25) within the inner walls of (14) + (18).

Figure No. 7 C

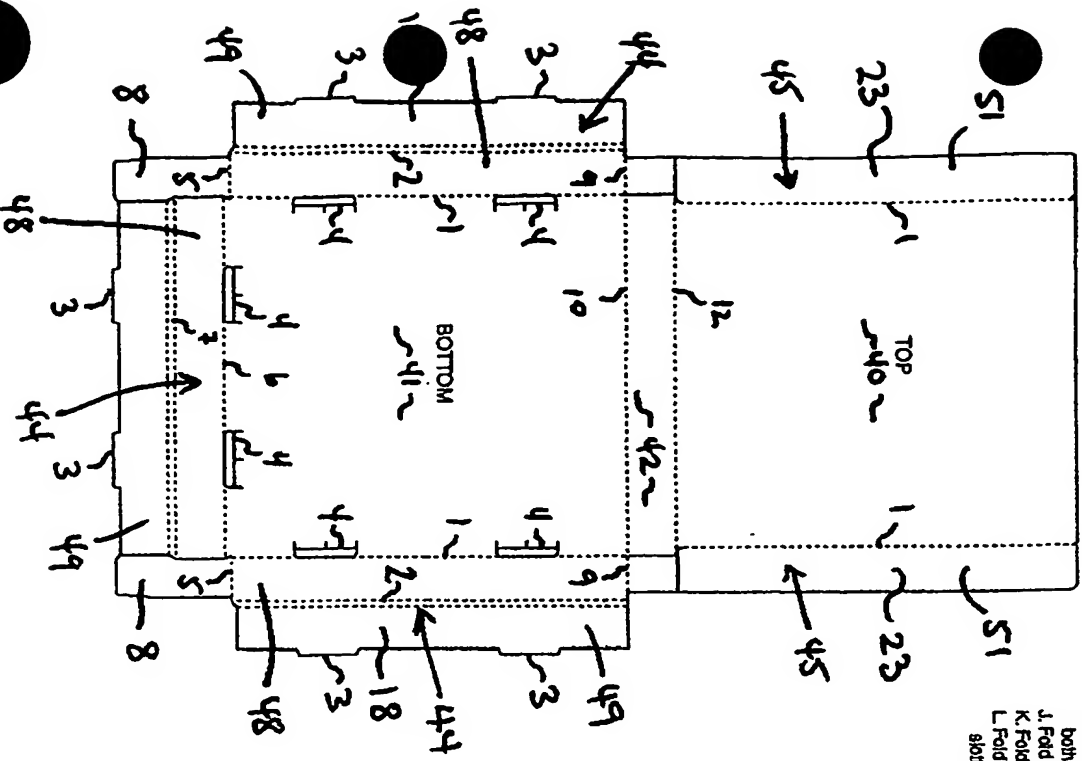


- A. Fold Bottom panel (1) 90 degrees.
- B. Fold Bottom panel (2) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (5) 90 degrees.
- E. Repeat A to D on the opposite side.
- F. Fold (6) 90 degrees.
- G. Fold (7) 180 degrees around (8).
- H. Slot (3) into (4).
- I. Fold Top panel (1) 90 degrees on both sides.
- J. Fold (8) 90 degrees on both sides.
- K. Fold (10) 90 degrees.
- L. Fold (12) 90 degrees III (23) are slotted within the inner walls of (18).

Figure No. 7 D

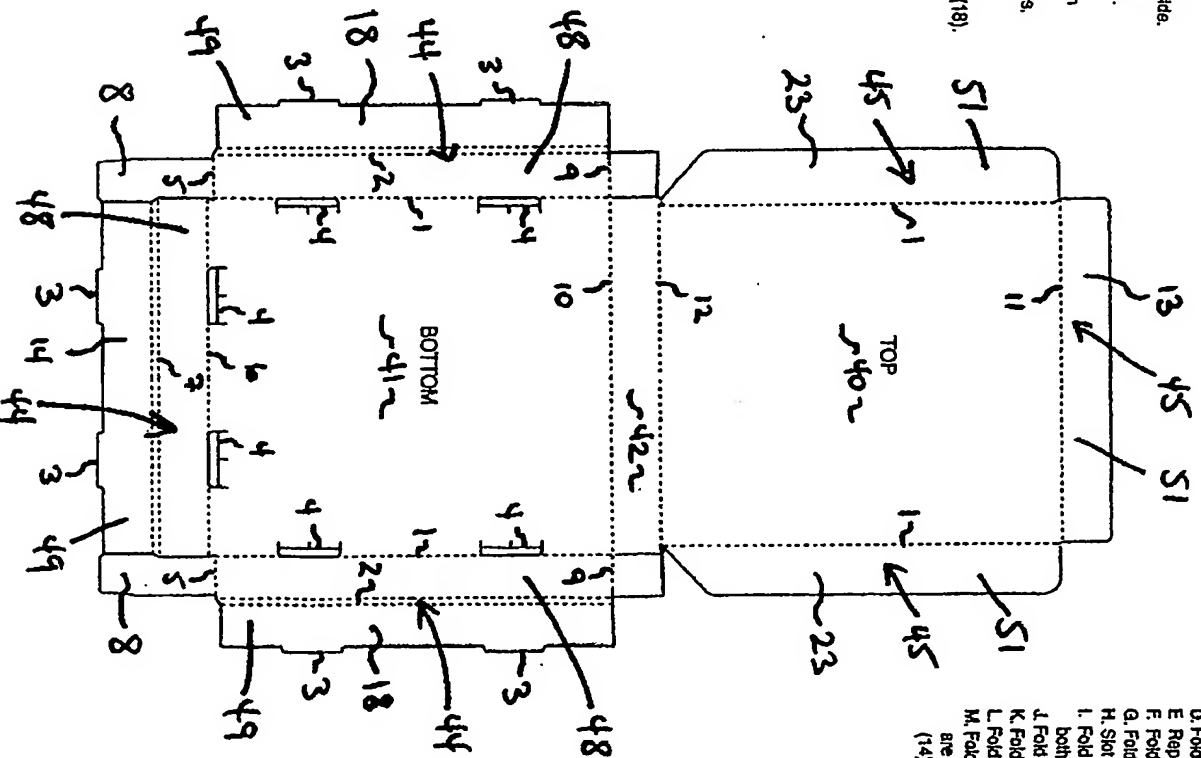


- A. Fold Bottom panel (1) 90 degrees.
- B. Fold Bottom panel (2) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (5) 90 degrees.
- E. Repeat A to D on the opposite side.
- F. Fold (6) 90 degrees.
- G. Fold (7) 180 degrees around (8).
- H. Slot (3) into (4).
- I. Fold Top panel (1) 90 degrees on both sides.
- J. Fold (11) 90 degrees.
- K. Fold (9) 90 degrees on both sides.
- L. Fold (10) 90 degrees.
- M. Fold (12) 90 degrees III (13) + (23) are slotted within the inner walls of (14) + (18).

Figure No. 7 E

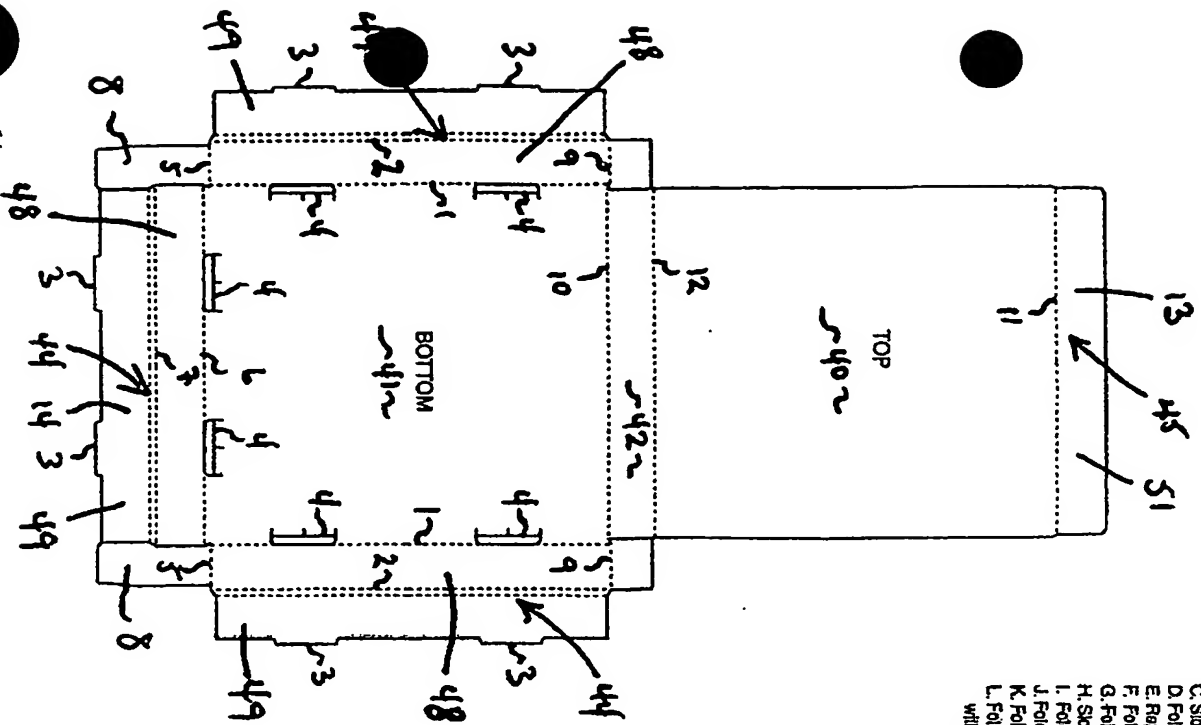


- A. Fold (1) 90 degrees.
- B. Fold (2) 180 degrees.
- C. Six (3) into (4).
- D. Fold (5) 90 degrees.
- E. Repeat A to D on the opposite side.
- F. Fold (6) 90 degrees.
- G. Fold (7) 180 degrees around (8).
- H. Six (3) into (4).
- I. Fold (8) 90 degrees on both sides.
- J. Fold (9) 90 degrees.
- K. Fold (10) 90 degrees.
- L. Fold (12) 90 degrees fit (13) is slotted within the inner wall of (14).

Figure No. 7 F

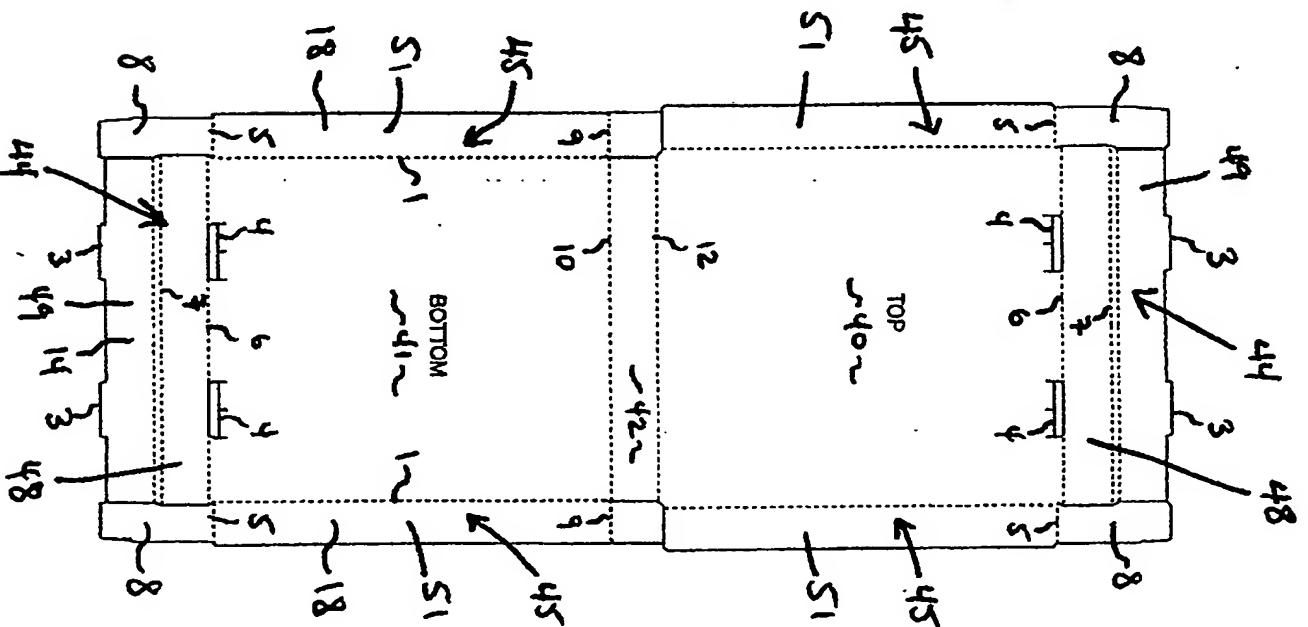


- A. Fold Bottom panel (1) 90 degrees.
- B. Fold Bottom panel (5) 90 degrees.
- C. Repeat A and B on the opposite side.
- D. Fold (6) 90 degrees.
- E. Fold (7) 180 degrees around (8).
- F. Six (3) into (4).
- G. Repeat A to F for the Top panel.
- H. Fold (8) 90 degrees.
- I. Fold (9) 90 degrees.
- J. Fold (12) 90 degrees fit Top panel sits over the outer walls of (14) + (18).

Figure No. 7 G

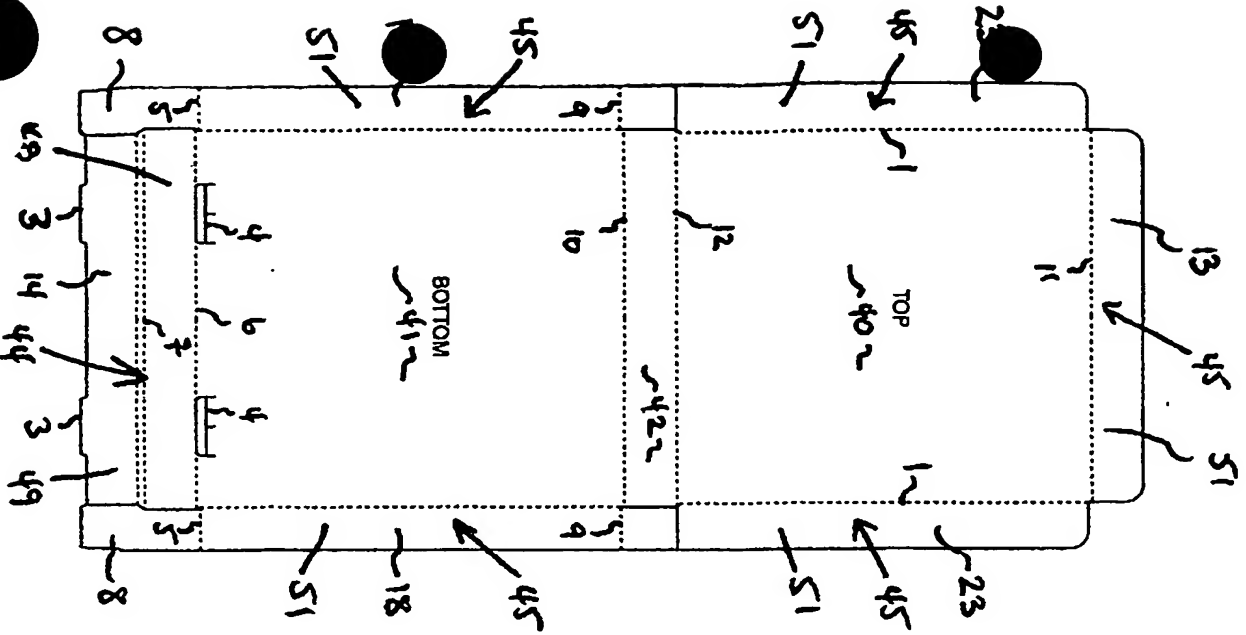


- A. Fold Bottom panel (1) 90 degrees.
- B. Fold (5) 90 degrees.
- C. Repeat A and B on the opposite side.
- D. Fold (6) 90 degrees.
- E. Fold (7) 180 degrees around (8).
- F. Slot (3) into (4).
- G. Fold Top panel (1) 90 degrees on both sides.
- H. Fold (11) 90 degrees.
- I. Fold (9) 90 degrees on both sides.
- J. Fold (10) 90 degrees.
- K. Fold (12) 90 degrees slot (13) + (23) within the inner walls of (14) + (18).

Figure No. 7 H

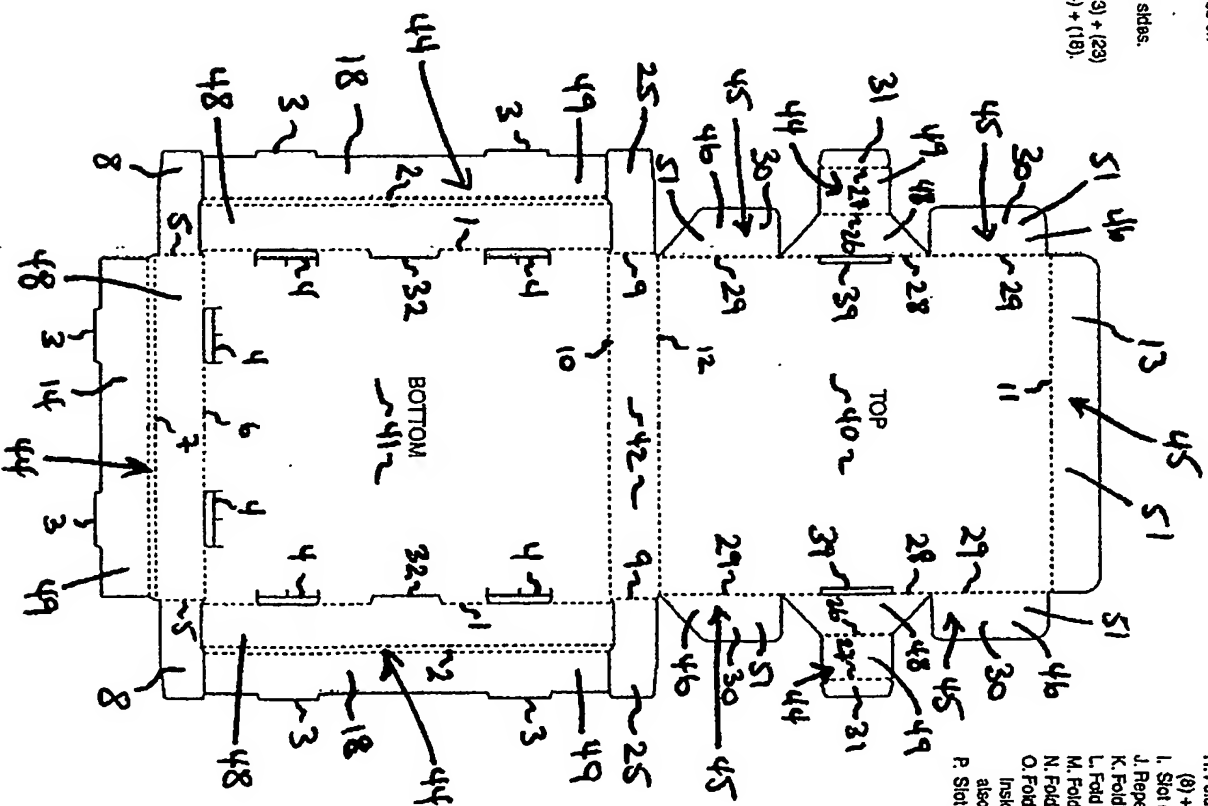


- A. Fold (6) 90 degrees.
- B. Fold (7) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (5) 90 degrees on both sides.
- E. Fold (10) 90 degrees.
- F. Fold (9) 90 degrees on both sides.
- G. Fold (1) 90 degrees.
- H. Fold (2) 180 degrees around (8) + (25).
- I. Slot (3) into (4).
- J. Repeat G to I on the opposite side.
- K. Fold (28) 90 degrees.
- L. Fold (29) and (27) 90 degrees.
- M. Fold (29) 90 degrees.
- N. Fold (11) 90 degrees.
- O. Fold (12) 90 degrees III (30) are inside the inner walls of (18) and also (13) is in the inner wall of (14).
- P. Slot (31) into (32).

Figure No. 8 A

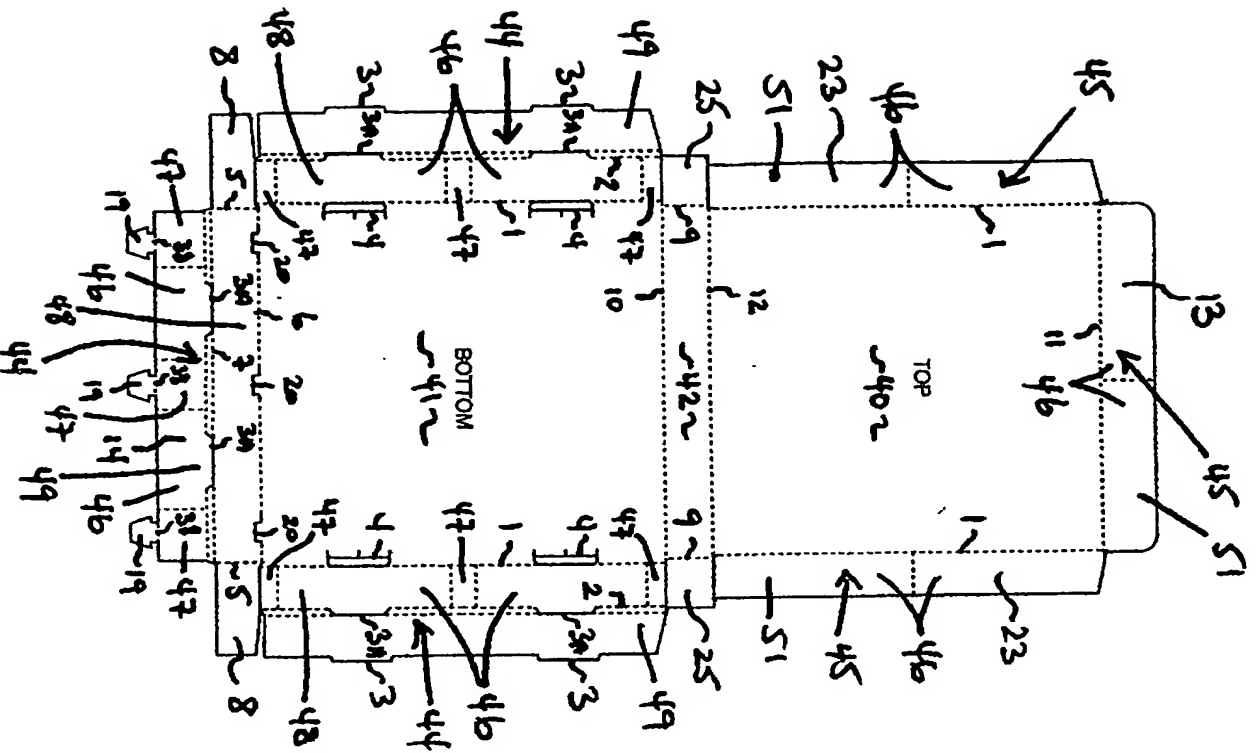


- A. Fold (6) 90 degrees.
- B. Fold (38) Reverse 90 degrees.
- C. Fold (7) Reverse 180 degrees.
- D. Slot (19) into (20).
- E. Fold (10) 90 degrees.
- F. Fold (5) 90 degrees.
- G. Fold (9) 90 degrees.
- H. Fold Bottom panel (1) 90 degrees.
- I. Fold Bottom panel (2) 180 degrees around (6) + (25).
- J. Slot (3) into (4).
- K. Repeat F to J on the opposite side.
- L. Fold (1) 90 degrees on both sides.
- M. Fold (11) 90 degrees.
- N. Fold (12) 90 degrees till (13) + (23) are slotted within the inner walls of (14) + (18).

Figure No. 8 B

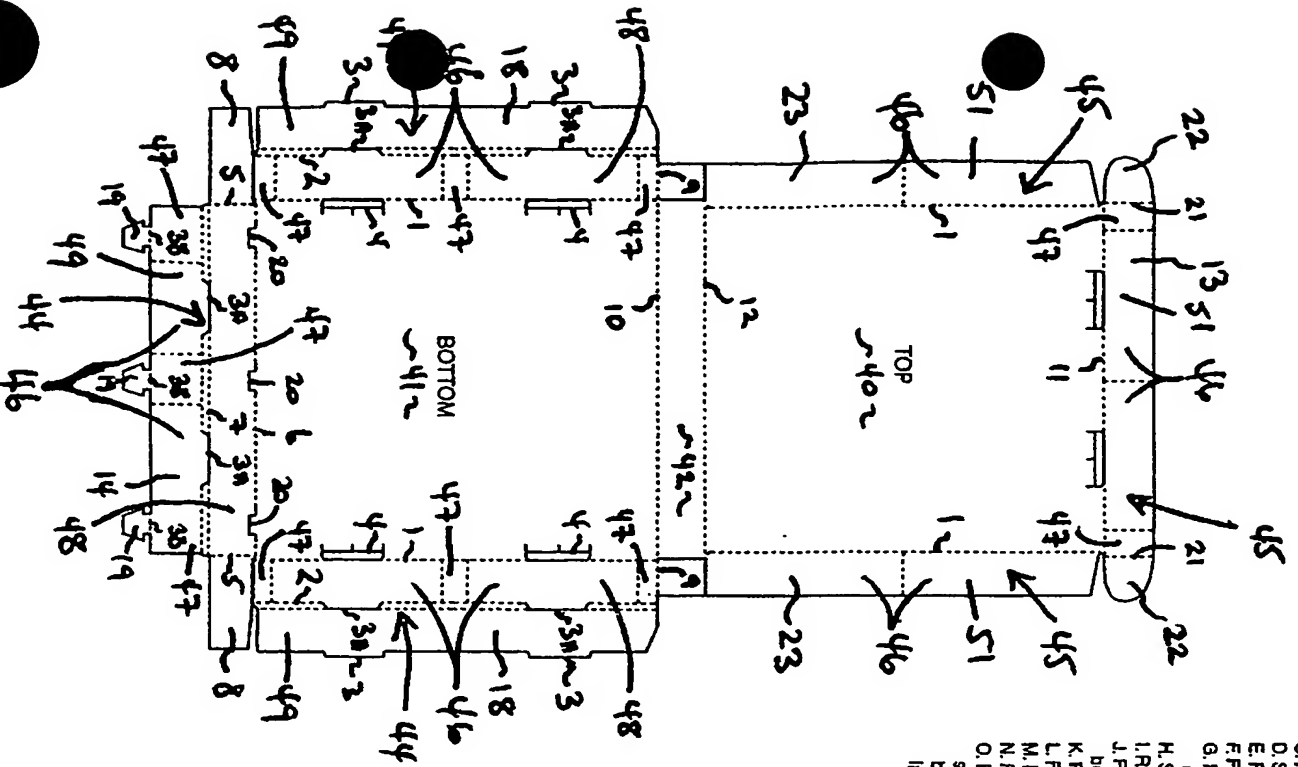


- A. Fold (6) 90 degrees.
- B. Fold (36) Reverse 90 degrees.
- C. Fold (7) Reverse 180 degrees.
- D. Slot (19) into (20).
- E. Fold Bottom panel (5) 90 degrees.
- F. Fold Bottom panel (1) 90 degrees.
- G. Fold Bottom panel (2) 180 degrees around (8).
- H. Slot (3) into (4).
- I. Repeat F to H on the opposite side.
- J. Fold Top panel (1) 90 degrees on both sides.
- K. Fold (11) 90 degrees.
- L. Fold (21) 90 degrees on both sides.
- M. Fold (9) 90 degrees on both sides.
- N. Fold (10) 90 degrees.
- O. Fold (12) 90 degrees III (22) is slotted into the opening of (18) on both sides and to place (23) on the inside of the bottom panel (18).

Figure No. 8 C

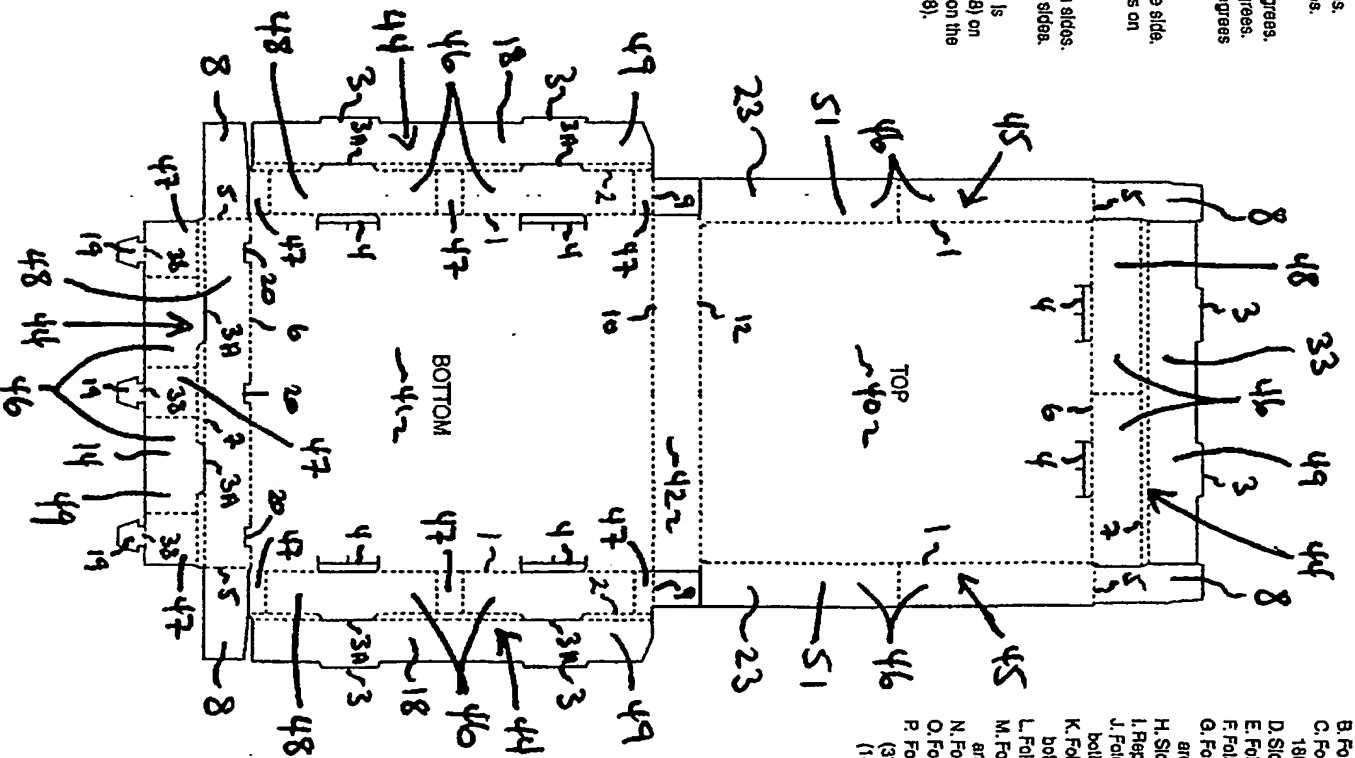


- A. Fold Bottom panel (6) 90 degrees
- B. Fold (36) Reverse 90 degrees.
- C. Fold Bottom panel (7) Reverse 180 degrees.
- D. Slot (19) into (20).
- E. Fold Bottom panel (5) 90 degrees
- F. Fold Bottom panel (1) 90 degrees.
- G. Fold Bottom panel (2) 180 degrees around (8).
- H. Slot (3) into (4).
- I. Repeat E to H on the opposite side.
- J. Fold Top panel (1) 90 degrees on both sides.
- K. Fold Top panel (5) 90 degrees on both sides.
- L. Fold Top panel (9) 90 degrees.
- M. Fold Top panel (7) 180 degrees around (8).
- N. Fold (8) 90 degrees on both sides
- O. Fold (10) 90 degrees.
- P. Fold (12) 90 degrees III (23) + (33) are within the inner walls of (14) + (18).

Figure No. 9 A

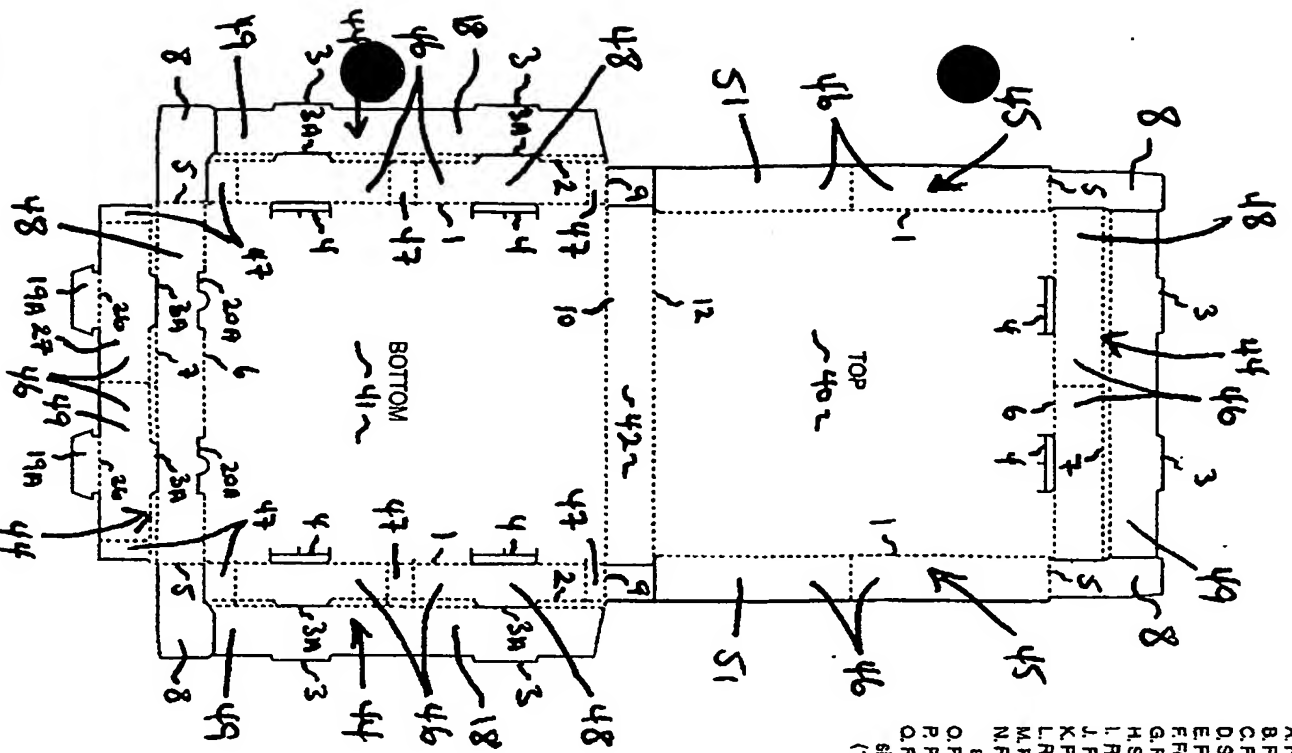


- A. Fold Bottom panel (8) 90 degrees.
- B. Fold (26) Reverse 90 degrees.
- C. Fold (7) Reverse 180 degrees.
- D. Slot (19A) into (20A).
- E. Fold (5) 90 degrees.
- F. Fold Bottom panel (1) 90 degrees.
- G. Fold (2) 180 degrees around (8).
- H. Slot (3) into (4).
- I. Repeat E to H on the opposite side.
- J. Fold Top panel (1) 90 degrees.
- K. Fold Top panel (5) 90 degrees.
- L. Repeat K and L on the opposite side.
- M. Fold Top panel (6) 90 degrees.
- N. Fold Top panel (7) 180 degrees around (8).
- O. Fold (9) 90 degrees on both sides.
- P. Fold (10) 90 degrees.
- Q. Fold (12) 90 degrees till Top panel is sitting inside the inner walls of (18) + (27).

Figure No. 9 B

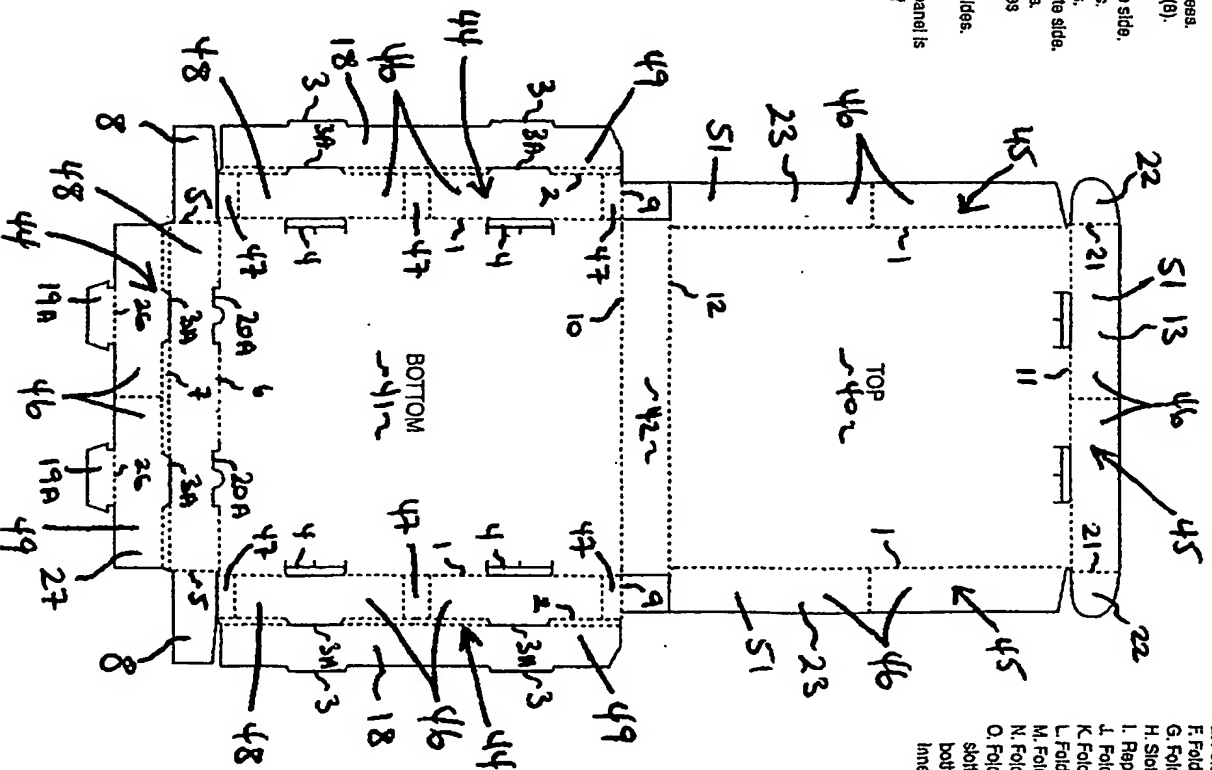


- A. Fold (8) 90 degrees.
- B. Fold (26) Reverse 90 degrees.
- C. Fold (7) Reverse 180 degrees.
- D. Slot (19A) into (20A).
- E. Fold (5) 90 degrees.
- F. Fold Bottom panel (1) 90 degrees.
- G. Fold (2) 180 degrees around (8).
- H. Slot (3) into (4).
- I. Repeat E to H to the opposite side.
- J. Fold (9) 90 degrees on both sides.
- K. Fold Top panel (1) 90 degrees.
- L. Fold (11) 90 degrees.
- M. Fold (21) 90 degrees.
- N. Fold (10) 90 degrees.
- O. Fold (12) 90 degrees until (22) is slotted into the opening of (18) on both sides and to place (23) on the inner walls of the Bottom panel (18).

Figure No. 10 A

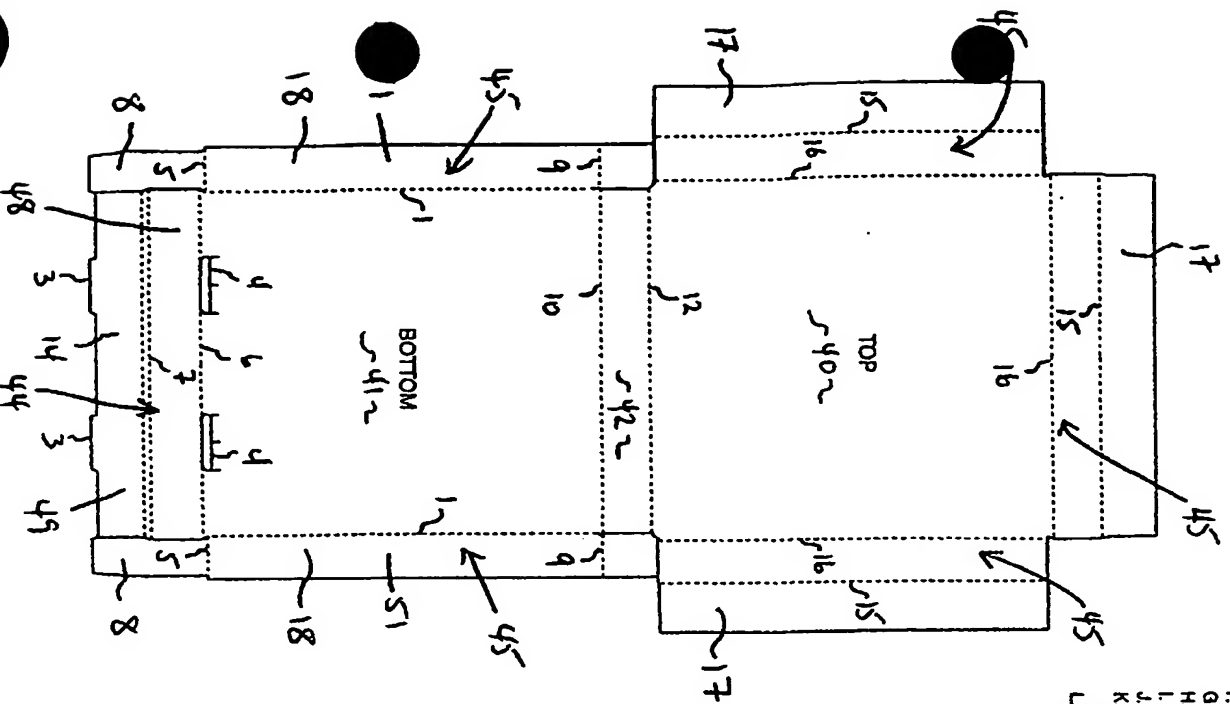


- A. Fold (1) 90 degrees.
- B. Fold (5) 90 degrees.
- C. Repeat A and B on the opposite side.
- D. Fold (6) 90 degrees.
- E. Fold (7) 180 degrees around (8).
- F. Slot (3) into (4).
- G. Fold (9) 90 degrees on both sides.
- H. Fold (10) 90 degrees.
- I. Fold (12) 90 degrees.
- J. Fold (15) 90 degrees upwards.
- K. Fold (16) 90 degrees downwards to form an L shape for (17).
- L. Repeat K to all sides so L shape will be against outer walls of (14) + (18).

Figure No. 10 B

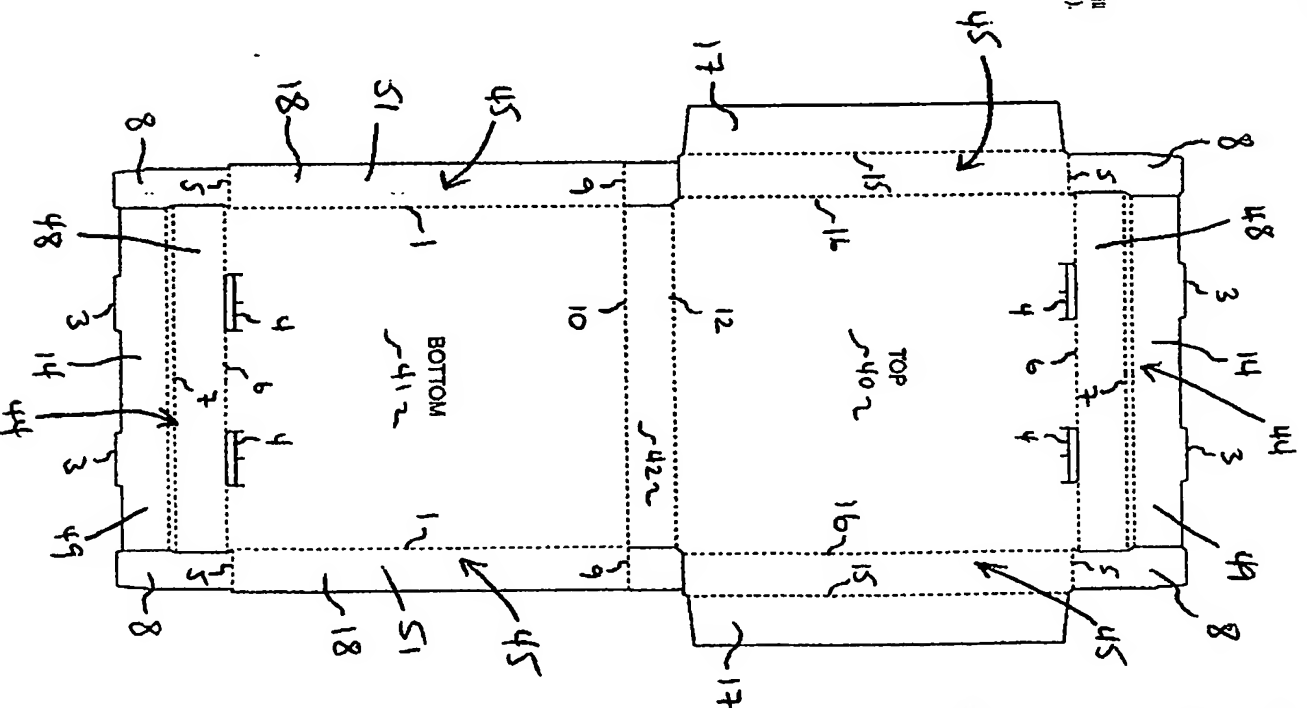


- A. Fold Bottom panel (1) 90 degrees on both sides.
- B. Fold Bottom panel (5) 90 degrees on both sides.
- C. Fold Bottom panel (9) 90 degrees.
- D. Fold Bottom panel (7) 180 degrees around (8).
- E. Slot (3) into (4).
- F. Fold (16) 90 degrees on both sides.
- G. Fold Top panel (5) 90 degrees on both sides.
- H. Fold Top panel (9) 90 degrees.
- I. Fold Top panel (7) 180 degrees around (8).
- J. Slot (3) into (4).
- K. Fold (15) Reverse 90 degrees into an L shape on both sides.
- L. Fold (9) 90 degrees on both sides.
- M. Fold (10) 90 degrees.
- N. Fold (12) 90 degrees till the Top panel is sitting on the Bottom panel and the Top panel (14) + (17) is on the outer walls of Bottom panel (14) + (18).

Figure No. 10 C

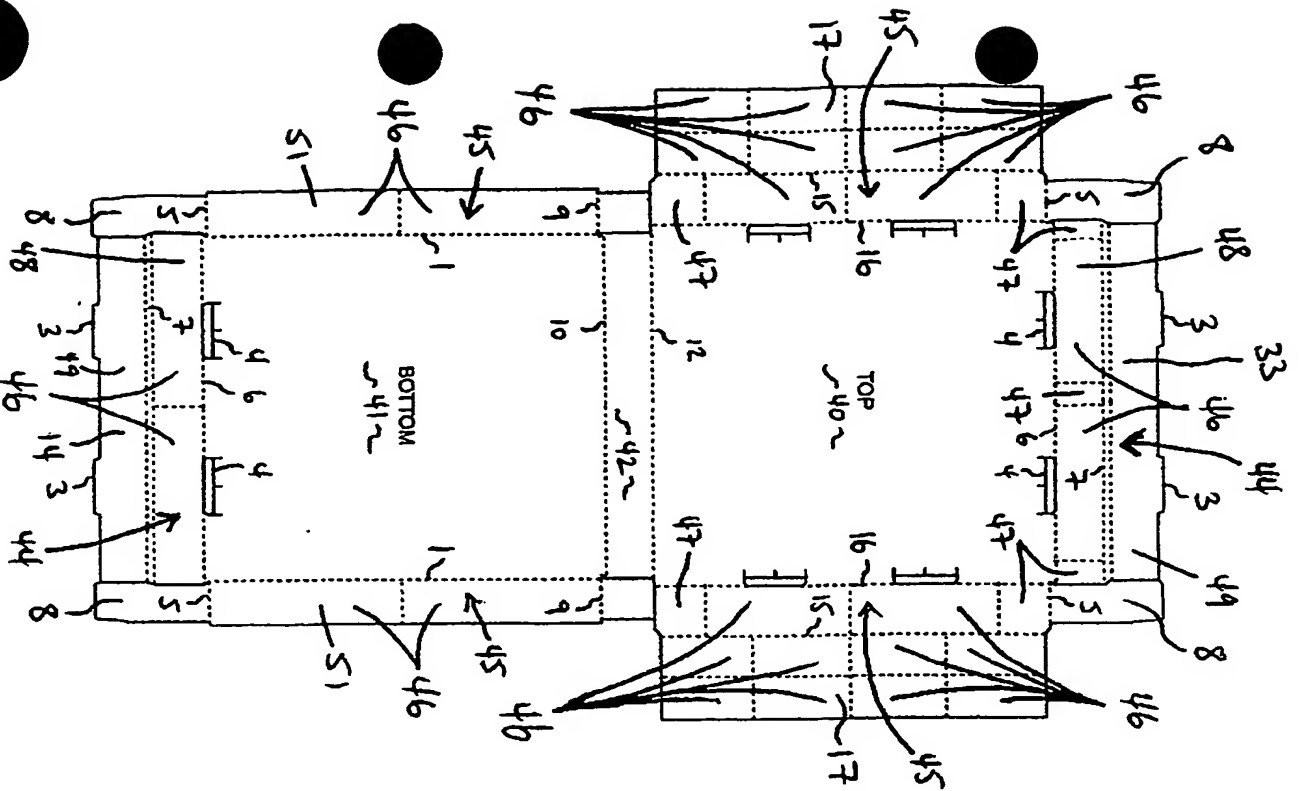


- A. Fold Bottom panel (1) 90 degrees on both sides.
- B. Fold Bottom panel (5) 90 degrees on both sides.
- C. Fold Bottom panel (6) 90 degrees.
- D. Fold Bottom panel (7) 180 degrees around (8).
- E. Slot (3) into (4).
- F. Fold (18) 90 degrees on both sides.
- G. Fold Top panel (5) 90 degrees on both sides.
- H. Fold Top panel (6) 90 degrees.
- I. Fold Top panel (7) 180 degrees around (8).
- J. Slot (3) into (4).
- K. Fold (15) Reverse 90 degrees into an L shape on both sides.
- L. Fold (9) 90 degrees on both sides.
- M. Fold (10) 90 degrees.
- N. Fold (12) 90 degrees till the Top panel is sitting on the Bottom panel and the Top panel (33) is on the outer walls of Bottom panel (14).

Figure No. 10 D

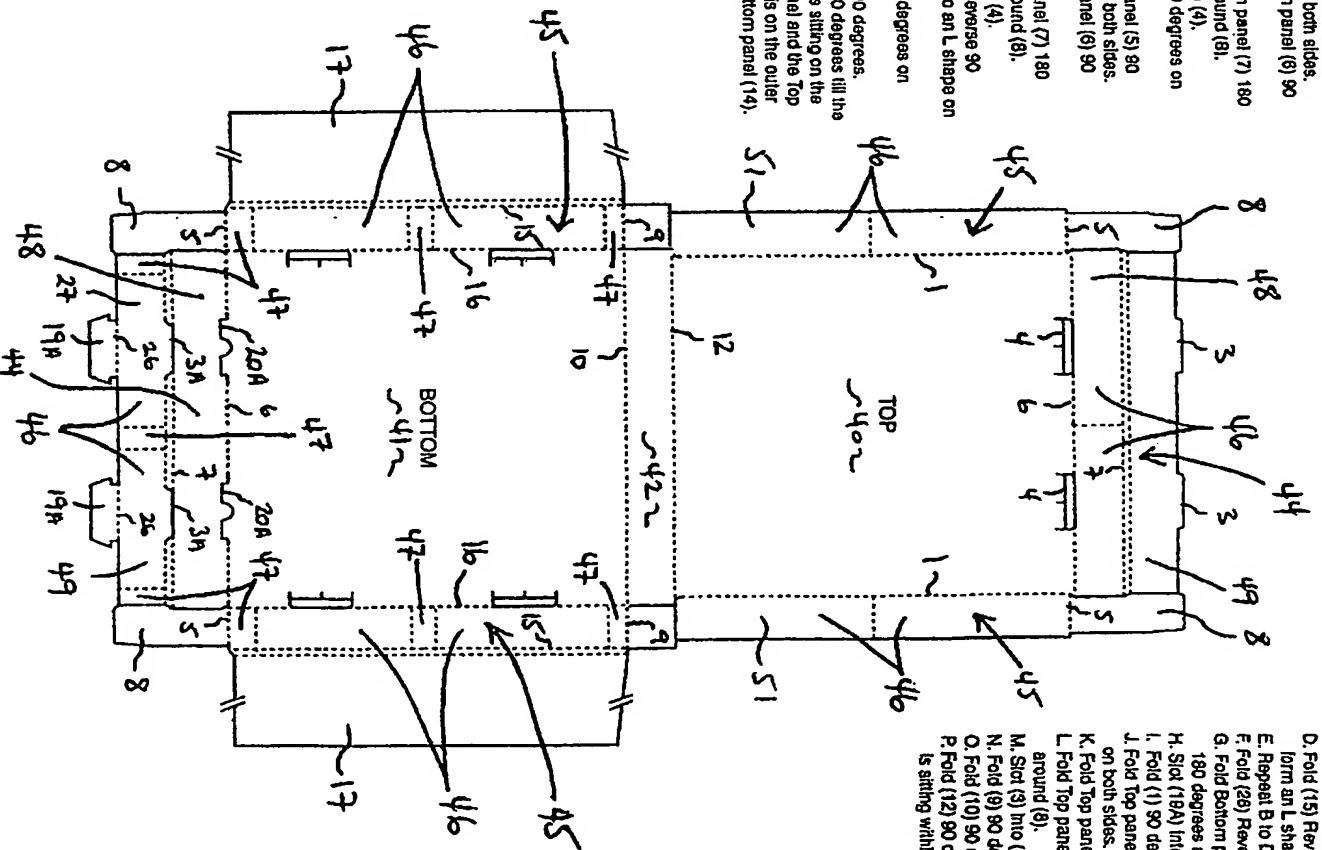


- A. Fold Bottom panel (6) 90 degrees.
- B. Fold (16) 90 degrees.
- C. Fold Bottom panel (6) 90 degrees.
- D. Fold (15) Reverse 90 degrees to form an L shape.
- E. Repeat B to D on the opposite side.
- F. Fold (28) Reverse 90 degrees.
- G. Fold Bottom panel (7) Reverse 180 degrees around (8).
- H. Slot (18A) into (20A).
- I. Fold (1) 90 degrees on both sides.
- J. Fold Top panel (6) 90 degrees on both sides.
- K. Fold Top panel (7) 180 degrees around (8).
- L. Fold Top panel (7) 180 degrees around (8).
- M. Slot (3) into (4).
- N. Fold (9) 90 degrees on both sides.
- O. Fold (10) 90 degrees.
- P. Fold (12) 90 degrees till Top panel is sitting within the Bottom panel.

Figure No. 1R

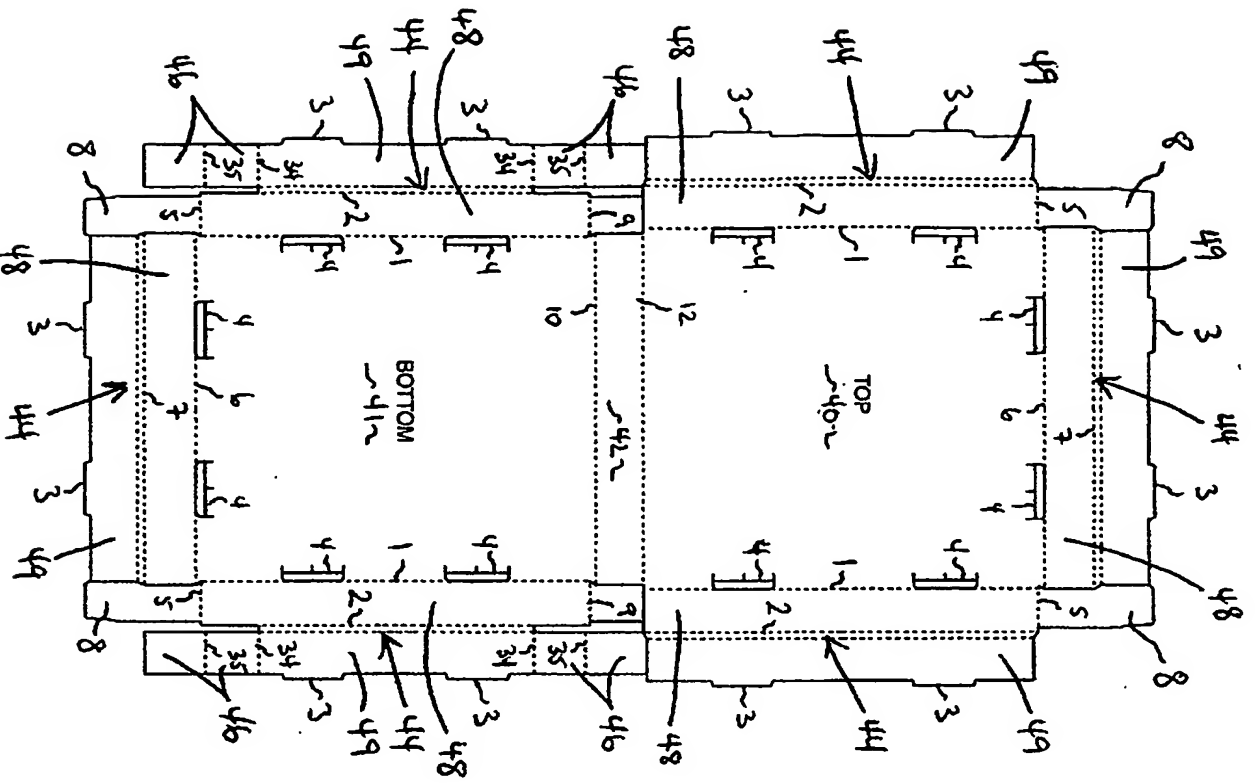


- A. Fold Bottom panel (1) 90 degrees.
- B. Fold Bottom panel (2) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (34) 80 degrees.
- E. Fold (35) Reverse 80 degrees.
- F. Fold Bottom panel (5) 80 degrees.
- G. Repeat A to F on the opposite side.
- H. Fold Bottom panel (6) 50 degrees.
- I. Fold Bottom panel (7) 180 degrees around (8).
- J. Slot (3) into (4).
- K. Fold Top panel (1) 90 degrees.
- L. Fold Top panel (2) 180 degrees.
- M. Slot (3) into (4).
- N. Fold Top panel (5) 90 degrees.
- O. Repeat K to N on the opposite side.
- P. Repeat H to J for the Top panel.
- Q. Fold (9) 80 degrees on both sides.
- R. Fold (10) 90 degrees.
- S. Fold (12) 80 degrees till the Top panel is sitting over the Bottom panel.

Figure No. 2R

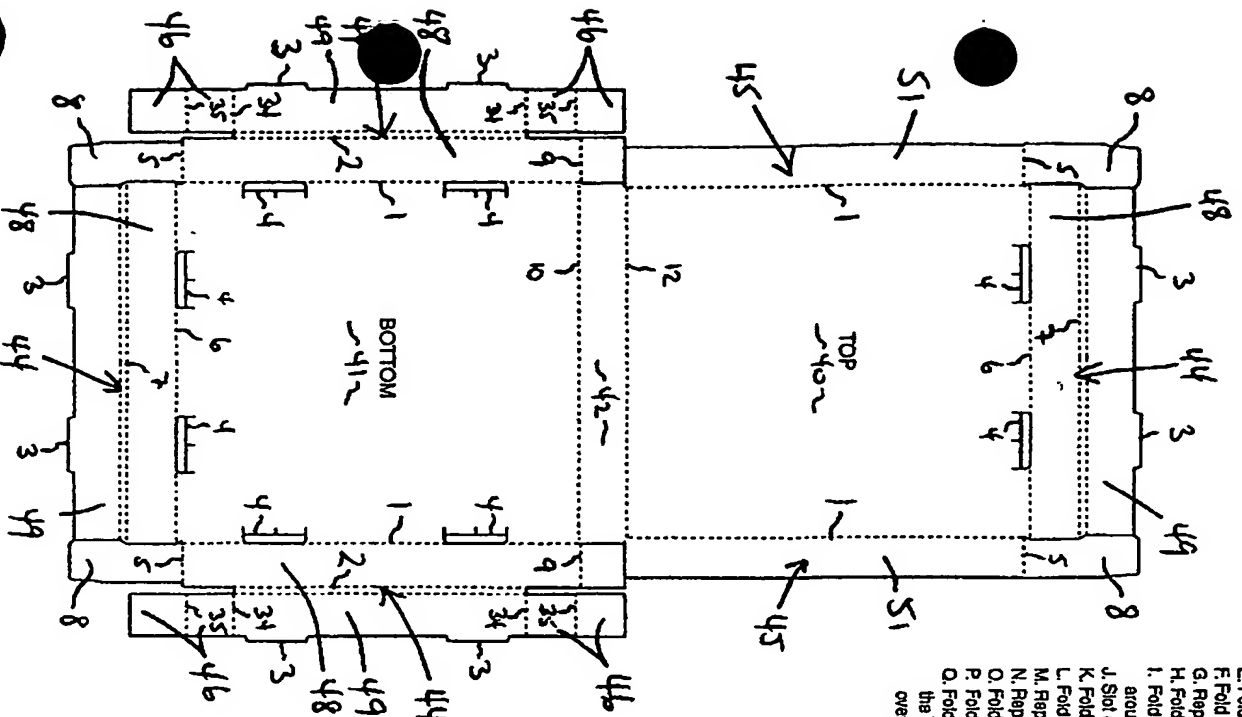


- A. Fold Bottom panel (1) 90 degrees.
- B. Fold Bottom panel (2) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (34) 90 degrees.
- E. Fold (35) Reverse 90 degrees.
- F. Fold Bottom panel (5) 90 degrees.
- G. Repeat A to F on the opposite side.
- H. Fold Bottom panel (6) 90 degrees.
- I. Fold Bottom panel (7) 180 degrees around (8).
- J. Slot (9) into (4).
- K. Fold Top panel (1) 90 degrees.
- L. Fold Top panel (5) 90 degrees.
- M. Repeat K to L on the opposite side.
- N. Repeat H to J for the Top panel.
- O. Fold (9) 90 degrees on both sides.
- P. Fold (10) 90 degrees.
- Q. Fold (12) 90 degrees till the Top panel is sitting over the Bottom panel.

Figure No. 3R

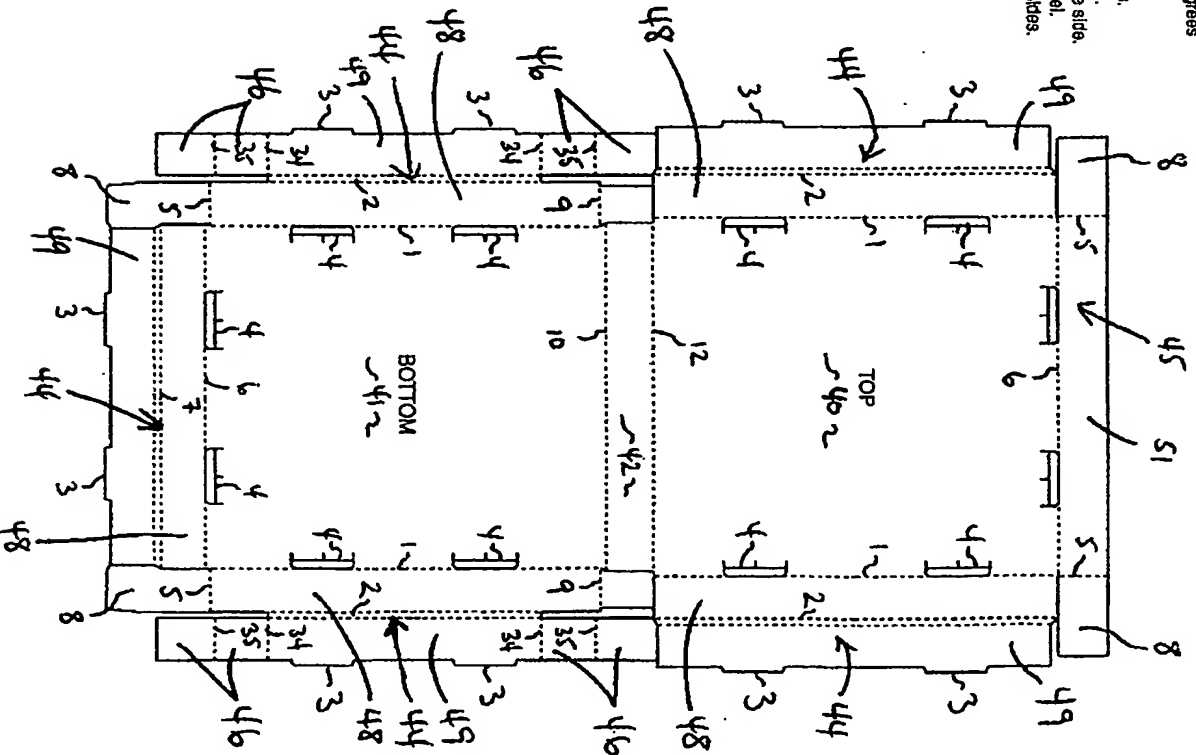


- A. Fold Bottom panel (1) 90 degrees.
- B. Fold Bottom panel (2) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (34) 90 degrees.
- E. Fold (35) Reverse 90 degrees.
- F. Fold Bottom panel (5) 90 degrees.
- G. Repeat A to F on the opposite side.
- H. Fold Bottom panel (6) 90 degrees.
- I. Fold Bottom panel (7) 180 degrees around (8).
- J. Slot (9) into (4).
- K. Fold Top panel (5) 90 degrees.
- L. Fold Top panel (5) 90 degrees on both sides.
- M. Fold Top panel (1) 90 degrees.
- N. Fold Top panel (2) 180 degrees around (8).
- O. Slot (9) into (4).
- P. Repeat M to O to the opposite side.
- Q. Fold (9) 90 degrees on both sides.
- R. Fold (10) 90 degrees.
- S. Fold (12) 90 degrees till the Top panel is sitting over the Bottom panel.

Figure No. 4R

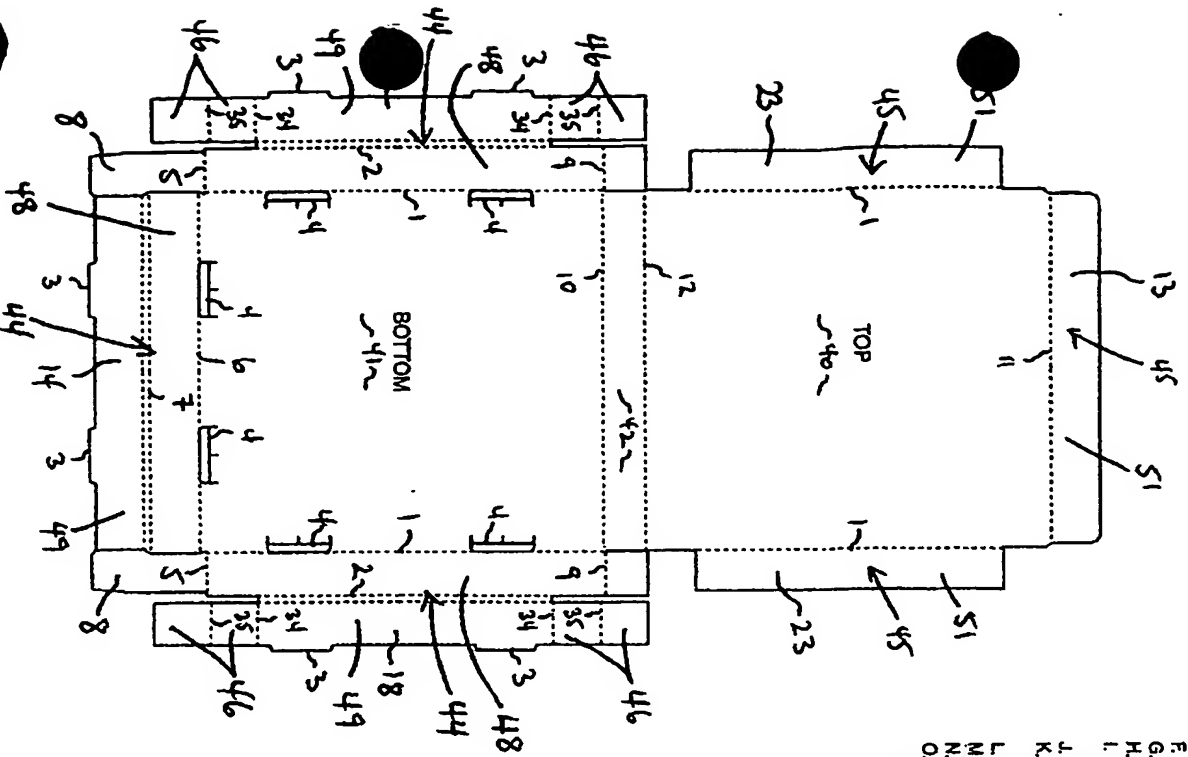

- A. Fold Bottom panel (1) 90 degrees.
- B. Fold Bottom panel (2) 180 degrees.
- C. Slot (3) into (4).
- D. Fold (34) 90 degrees.
- E. Fold (35) Reverse 90 degrees.
- F. Fold Bottom panel (5) 90 degrees.
- G. Repeat A to F on the opposite side.
- H. Fold Bottom panel (6) 90 degrees.
- I. Fold Bottom panel (7) 180 degrees around (8).
- J. Slot (3) into (4).
- K. Fold Top panel (1) 90 degrees on both sides.
- L. Fold (11) 90 degrees.
- M. Fold (8) 90 degrees on both sides.
- N. Fold (10) 90 degrees.
- O. Fold (12) 90 degrees into (13) + (23) are sitting inside the Bottom panel walls of (14) + (18).

Figure No. 5R

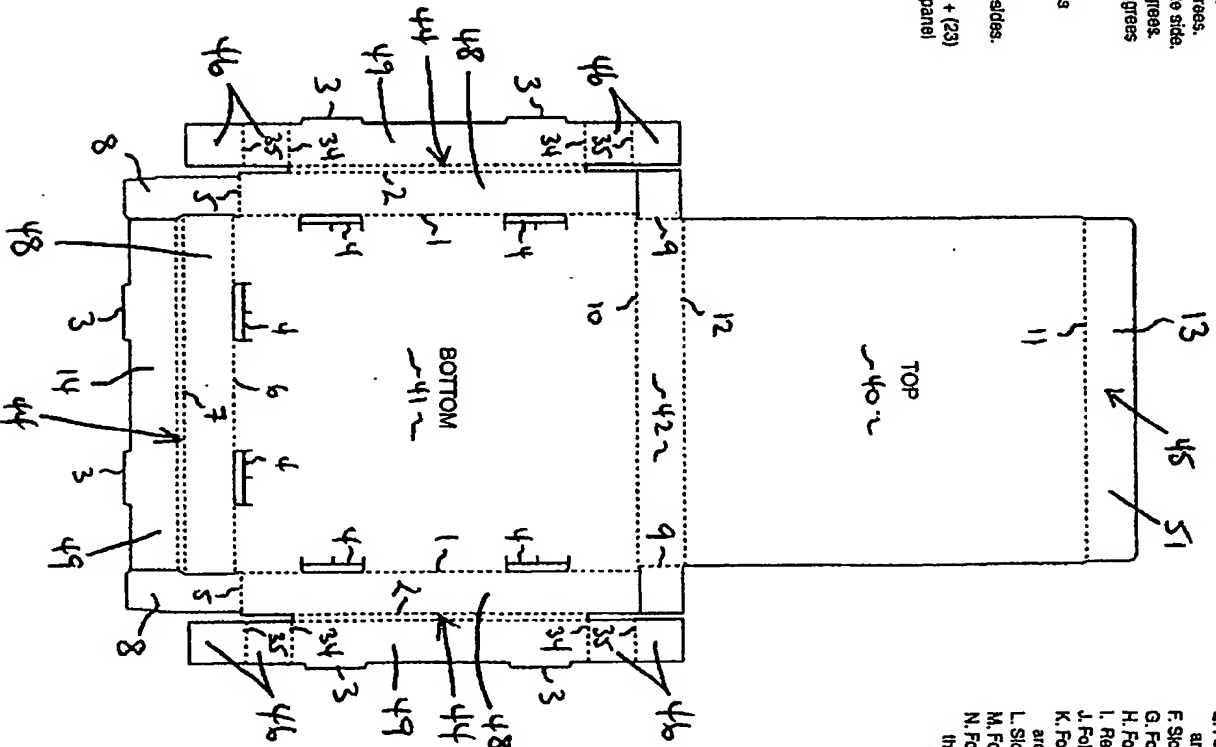

- A. Fold (10) 90 degrees.
- B. Fold (9) 90 degrees.
- C. Fold Bottom panel (1) 90 degrees.
- D. Fold (34) Reverse 90 degrees.
- E. Fold Bottom panel (2) 180 degrees around (25).
- F. Slot (3) into (4).
- G. Fold (35) Reverse 90 degrees.
- H. Fold Bottom panel (5) 90 degrees.
- I. Repeat B to H on the opposite side.
- J. Fold Bottom panel (6) 90 degrees.
- K. Fold Bottom panel (7) 180 degrees around (8).
- L. Slot (3) into (4).
- M. Fold (11) 90 degrees.
- N. Fold (12) 90 degrees into (13) is in the inner wall of (14).